



# Mitutoyo

Distributed By:



## Tool+Cutter

www.toolandcutter.com



Small Tool Instruments and Data Management

Form Measurement

Digital Scales and DRO Systems

Sensor Systems

Test Equipment

Optical Measurement

# FALL PROMO 2025

## PRECISION TOOLS & INSTRUMENTS

Effective October 1st through December 23rd

FALL PROMO 2025



## Tool+Cutter

www.toolandcutter.com

Bulletin No. 2374



NEW FEATURED

## PRODUCTS



### Dear Valued Customers,

I want to thank you for your continued support of the Mitutoyo product and our team members in operations around the world. This has been a busy and interesting year for all of us at Mitutoyo Canada. We have worked closely with our factory and development staff to continue to expand our product lineup and overall capability with new products and enhancements to some tools that have been a part of our brand for many years.

In addition, in North America, we have continued to expand programs to provide support and re-sources to you, your team and the supply chain we all depend on. One example of these programs is our educational content that will help you support new employees or skill development for existing staff when new challenges are faced. You will find access to these programs from our main website (Mitutoyo.ca). Look under the "About Us" tab and then click on "Training & Education." While on the website, you may also look up our calibration and repair programs. You may be surprised to also find new services offered such as contract inspection and contract part programming. I hope that you explore these programs and reach out to one of the Mitutoyo Canada team members or valued distributor partners for more information.

The 2025 Mitutoyo Fall Promotion discounts on the most commonly used tools and instruments you will find in shops all around the country. We hope this promotion will support your year-end and future needs with valuable packages and discounts.

Once again, I thank you for your continued support of Mitutoyo-made measuring solutions.

Sincerely,

Matt Dye  
President, Mitutoyo America Corporation and Mitutoyo Canada

*Matthew B. Dye*



## TABLE OF CONTENTS



### MDE QuantuMike ..... 3

The new MDE QuantuMike delivers faster measurements - up to 4x faster than standard micrometers - with exceptional accuracy ( $\pm 1 \mu\text{m}$  permissible error), an IP65 protection rating, and a user-friendly design with enhanced display.



### SurfTest SJ-220 ..... 4

Highly versatile surface roughness instruments, including portable models, are full of features and capabilities. Mitutoyo surface roughness testers deliver precise and accurate measurements.



### ID-C/ID-F Digimatic Indicators ..... 8

These new Digimatic Indicators have higher resolutions down to 20µinch/0.5 µm, a built-in calibration date warning and analog bar on the larger LCD display, and new S1 Digimatic output capabilities.



### Dial Test Indicators ..... 12

Mitutoyo test indicators provide enhanced durability, sensitivity, usability, readability, and most importantly, incredible accuracy. Mitutoyo offers a range of different types of test indicators along with accessories and sets for any application and industry.



### Profile Projectors ..... 16

Mitutoyo profile projectors provide some of the most accurate and clear images on the market. Easily capture accurate measurements without blurring, distortion or complex calculations using our modular 2D digital readouts.



### LH-600F Linear Height Gages ..... 20

The Mitutoyo LH-600F Linear Height Gage is the latest model in the Mitutoyo Linear Height Gage line with several new features like an adjustable and rotatable display, intuitive touchscreen interface, and added output options for even easier, highly accurate 1D and 2D dimensional measurements.

### QuantuMike..... 3

### SurfTest SJ-220 Packages ..... 4

### Tool Kits ..... 6

### Indicators ..... 8

### Dial Test Indicators ..... 9

### Bore Gages ..... 12

### Holtest ..... 13

### Borematic ..... 15

### Profile Projectors ..... 16

### Quick Image..... 18

### LH-600F Height Gage..... 20

### QM Height Gage..... 22

### Calipers/Caliper Checker..... 24

### Micrometers ..... 26

### U-WAVE Bluetooth® Wireless

### Data Transmitters ..... 28

### U-WAVE Wireless

### Data Transmitters ..... 29

### Litematic Units ..... 30

### Linear Gages/EJ Counters ..... 31

### Digimatic Scale Units ..... 32

### Linear Encoders..... 33

### Hardness Testers ..... 34

### Microscopes..... 38



## QuantuMike

High-speed, high-accuracy micrometer measures 4x faster vs standard micrometers



DIGIMATIC S1 IP65



**4x Faster  
1µm Accuracy**




## New Features

- GO/NO-GO icons: at-a-glance verification
- Calibration date alerts: warning and due date alerts
- Approach Speed Warning: reduce over-torquing
- Calculation: auto-calculate corrections and more
- S1 Digimatic output — send measurement to Excel or easily program features with software (ITPak 3.0 or MeasurLink®)
- Auto power On/Off. Key customization

## Continued Great Features

- 4x faster spindle speed
- Preset, Zero, Hold, Function Lock, Error display
- 1-pc Ratchet Thimble + Speeder
- Resolution: .00005" / 0.001mm
- Accuracy: +/- .00005" / 0.001mm

Comparison of time needed to measure a 6-stepped workpiece (with one hand)

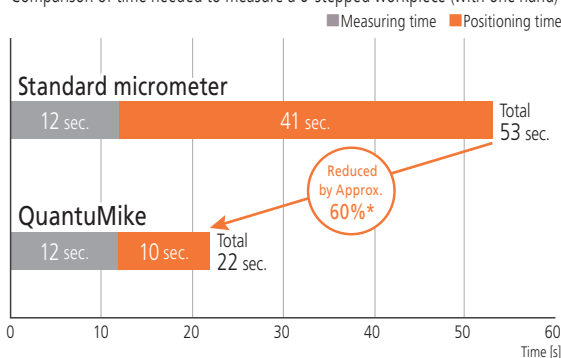

New S1 output — Send Measurement Wired or Wireless



**GO/NG icons**

Displays tolerance judgment mark

Tolerance judgment function: ON

Pass

16.985 mm

- NG 16.961 + NG 16.996

**Auto-calculate**

Calculates and displays correction value

Calculation function: ON

Correction value can be read directly

0.193 mm

Ax+B

Customized key setting allows the user to easily switch between measurement values and calculation results with the press of a button.

**Calibration alerts**

Forewarning

Calendar icon flashes

15.680 mm

Due date

Entire display flashes

15.680 mm

| Order No.  | Description                                                  | List     | Promo    |
|------------|--------------------------------------------------------------|----------|----------|
| 293-180-40 | QUANTUMIKE MICROMETER, DIGIMATIC, 0-1", IP65, .00005", W/SPC | \$406.25 | \$385.94 |
| 293-181-40 | QUANTUMIKE MICROMETER, DIGIMATIC, 1-2", IP65, .00005", W/SPC | \$465.00 | \$441.75 |
| 293-182-40 | QUANTUMIKE MICROMETER, DIGIMATIC, 2-3", IP65, .00005", W/SPC | \$554.00 | \$526.30 |
| 293-183-40 | QUANTUMIKE MICROMETER, DIGIMATIC, 3-4", IP65, .00005", W/SPC | \$605.00 | \$574.75 |



All prices are in Canadian Dollars

## Versatility

Expand functionality by linking with a smartphone, etc.

## Compatibility


Connectable and convenient. High-speed transmission of measurement data. Significantly strengthened communication functions.

## USB communication for sending and receiving measurement data

Bidirectional communication is possible by connecting the SJ-220 to a PC with a USB cable and installing the dedicated app "SJ-Communication-Tool".

Measurement work can be made more efficient by setting measurement conditions on the PC.


\*The USB connector also serves as a charging port.

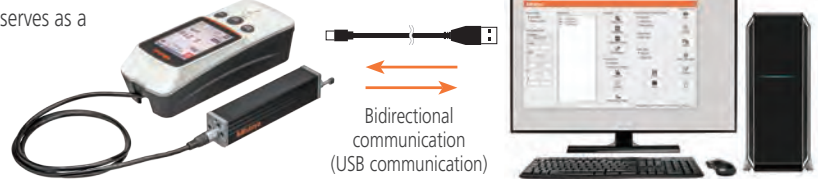

## Dedicated app "SJ-App" for increased efficiency of measurement work

The dedicated app that enables communication with the SJ-220 is equipped with various functions to increase work efficiency. It is also possible to manage data, create inspection reports, and export to CSV and PDF files on the terminal.

Smartphone icon display

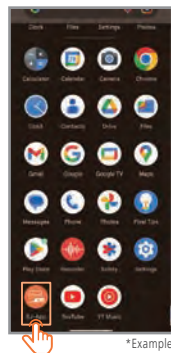


\*Example


Startup screen



Calculation result



Inspection report



### App



Dedicated smartphone app "SJ-App"

Freely available



Can be downloaded from the Mitutoyo website.


■ Download site URL

<https://www2.mitutoyo.co.jp/eng/contact/products/SJ-App/>

Android 12 or later, Bluetooth® 5.0 compatible (Android only)

## Added convenience by linking to PC with highly functional free software, "SJ-Communication-Tool"

We provide free software that allows you to import various data (measurement conditions, parameter settings, calculation results, measurement data) from the SJ-220 to create and edit inspection reports on your PC. This software can significantly reduce the time it takes to create reports.



Confirmed operation environments

■ OS: Windows 10 (64 bit), Windows 11 (64 bit)

\* Windows is a product of Microsoft Corporation.

\* Connection requires a USB 2.0 Cable or a Wireless Unit for Measuring Instrument U-WAVE-TIB.

### Software



PC-linked software "SJ-Communication-Tool"

Freely available



Can be downloaded from the Mitutoyo website.

■ Download site URL

<https://www2.mitutoyo.co.jp/eng/contact/products/SJ-Communication-Tool/>

Windows 10/11, Bluetooth® 5.0 compatible (Windows only)

Prices effective October 1 through December 23, 2025

### Surftest SJ-220 Packages

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

- NEW 2.8" color touch screen makes navigation and measuring condition settings easier to perform.
- The built-in battery charges via USB Type-C has approximately 1,000 measurements on a full charge (4 hours charging time).
- Performs roughness analysis conforming to international standards JIS '82 / JIS '94 / JIS '01 / ISO '97 / ANSI/VDI including ISO21920.
- Optional MicroSD card can store up to 500 measurement conditions, 10,000 measurement results and 500 image data.
- New [HOME] key lets the operator easily recall frequently used calibration and measurement conditions.

**UP TO  
20%  
OFF**

**NEW**  
Products




178-742-13

**ASK US ABOUT OUR SJ-220 ELEARNING COURSE**

Wireless connectivity now available for increased measurement data



With Wireless Unit for Measuring Instrument U-WAVE-TIB installed

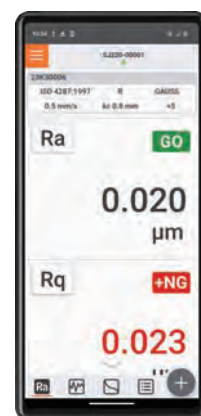

| Order No.  | Description                                                                      | List       | Promo      |
|------------|----------------------------------------------------------------------------------|------------|------------|
| 178-741-13 | Surftest SJ-220 Standard drive unit type 0.75mN inch                             | \$3,829.00 | \$3,638.00 |
| 178-742-13 | Surftest SJ-220 Standard drive unit type 4mN inch                                | \$3,829.00 | \$3,638.00 |
| 178-744-13 | Surftest SJ-220 R-Drive unit type 4mN inch                                       | \$4,508.00 | \$4,283.00 |
| 12AAA221   | Adapter, Magnetic Stand, Dia. 8mm                                                | \$65.00    | \$48.75    |
| 178-069    | Stand, SJ-210/310/410                                                            | \$1,456.00 | \$1,412.00 |
| 178-390    | Detector, Standard, 4MN, SJ                                                      | \$650.00   | \$487.50   |
| 264-628    | WIRELESS UNIT FOR MEASURING INST U-WAVE-TIB                                      | \$410.00   | \$390.00   |
| 12AAA233   | Adapter, Height Gauge, 1/4" X 1/2"                                               | \$147.00   | \$125.00   |
| 570-413    | Height Gauge, Digimatic, Absolute Linear Encoder 0-18", .0005" / 0-450mm, 0.01mm | \$1,383.00 | \$1,313.85 |



12AAA233



12AAA233



12AAA221



178-390



570-413



178-069



All prices are in Canadian Dollars

**10%  
OFF**

## Soft Case Tool Kits

Durable Protective Cases

New protective cases for your tools offer a modern alternative to our wooden cases. Versions include mechanical, standard Digimatic, or QuantuMike-based sets. QuantuMikes are just as accurate as standard Digimatic micrometers, but up to 4x faster.

Empty cases are also available as a new home for your existing tools!



64PKA288A



**RUGGED, IMPACT-RESISTANT BUILD**

**CASE MOULDS FOR DIGIMATIC AND MECHANICAL TOOLS**

**LONG-LIFE ZIPPERS AND STAIN-RESISTANT COVER**

**2X MAGNET-BACKED SLOTS FOR HOLDING STEEL RULES, SPANNERS, THUMB DRIVES AND MORE**



Prices effective October 1 through December 23, 2025



64PKA283

### Soft Case Tool Kit Components for 64PKA283

| Part #   | Description                                   |
|----------|-----------------------------------------------|
| 103-135  | MIC, OUTSIDE, 0-1", 0.0001", FRICTION THIMBLE |
| 182-204  | STEEL RULE 6" 3R FLEXIBLE                     |
| 505-742J | DIAL CALIPER, 6", .1"/REV                     |
| 64PMT183 | CASE FOR MECHANICAL TOOL KIT                  |



64PKA284

### Soft Case Tool Kit Components for 64PKA284

| Part #   | Description                              |
|----------|------------------------------------------|
| 103-177  | MIC, OUTSIDE, 0-1", 0.001", RATCHET STOP |
| 182-102  | STEEL RULE 6" 16R RIGID                  |
| 505-740J | DIAL CALIPER, 6", .2"/REV                |
| 64PMT183 | CASE FOR MECHANICAL TOOL KIT             |



64PKA285

### Soft Case Tool Kit Components for 64PKA285

| Part #     | Description                            |
|------------|----------------------------------------|
| 293-340-30 | 1" RATCHET STOP MICROMETER (NO SPC)    |
| 500-196-30 | DIGIMATIC CALIPER, 6"/150MM, NO OUTPUT |
| 64PMT182   | CASE FOR DIGIMATIC TOOL KIT            |



64PKA286

### Soft Case Tool Kit Components for 64PKA286

| Part #     | Description                             |
|------------|-----------------------------------------|
| 293-348-30 | 1" FRICTION THIMBLE MICROMETER (NO SPC) |
| 500-196-30 | DIGIMATIC CALIPER, 6"/150MM, NO OUTPUT  |
| 64PMT182   | CASE FOR DIGIMATIC TOOL KIT             |



64PKA288A

### Soft Case Tool Kit Components for 64PKA288A

| Part #     | Description                                                   |
|------------|---------------------------------------------------------------|
| 293-180-40 | QUANTUMIKE MICROMETER, DIGIMATIC, 0-1", IP65, .00005", W/ SPC |
| 500-171-30 | DIGIMATIC CALIPER, 6"/150MM, W/ OUTPUT                        |
| 64PMT182   | CASE FOR DIGIMATIC TOOL KIT                                   |

## Soft Case Tool Packages

| Package # | Description                                                                         | List     | Promo    |
|-----------|-------------------------------------------------------------------------------------|----------|----------|
| 64PKA283  | TOOL PKG, MECHANICAL, INCH, W/ 6" DIAL CALIPER, 1" OUTSIDE MIC, 6" STEEL RULE, CASE | \$444.00 | \$399.60 |
| 64PKA284  | TOOL PKG, MECHANICAL, INCH, W/ 6" DIAL CALIPER, 1" MIC, 6" STEEL RULE, CASE         | \$375.00 | \$337.50 |
| 64PKA285  | TOOL PKG, DIGIMATIC, INCH, W/ 1" MIC (RATCHET STOP TYPE), 6" CALIPER, CASE          | \$558.00 | \$502.20 |
| 64PKA286  | TOOL PKG, DIGIMATIC, INCH, W/ 1" MIC (FRICTION THIMBLE TYPE), 6" CALIPER, CASE      | \$565.00 | \$508.50 |
| 64PKA288A | TOOL PKG, DIGIMATIC, INCH, W/1" QUANTUMIKE, 6" CALIPER, CASE, WITH OUTPUT           | \$739.25 | \$665.33 |

## Protective Case Only

| Package # | Description                  | List    | Promo   |
|-----------|------------------------------|---------|---------|
| 64PMT182  | CASE FOR DIGIMATIC TOOL KIT  | \$74.00 | \$66.60 |
| 64PMT183  | CASE FOR MECHANICAL TOOL KIT | \$77.00 | \$69.30 |




SCAN ME

All prices are in Canadian Dollars

## ID-C / ID-F Digimatic Indicators

High-performance ABS Digimatic Indicators

- > 20 pinch/0.5 µm resolution.
- > Large screen and analog bar.
- > Calibration period notification function. The LCD displays an icon to notify the user when the set calibration time approaches. This facilitates the proper precision management of ID-C/ID-F.
- > Simple Calculation Function.
- > New Digimatic S1 Output\*. S1 is the new Mitutoyo bidirectional output format that enables reading and writing information to the gages such as sending a zero command, TIR reset, calibration date warnings, and the ability to poll the serial number for smoother measurement operation. Communication is supported by the new Input Tool and SPC cable, see table below.



Calibration period notification function



0.5" ID-F MODEL NOW AVAILABLE



ID-C Series



ID-F Series

### Large screen and analog bar

The units have large screens that can display various information in an easy-to-read manner. They also have an analog bar, convenient for observing subtle movements such as the approach to tolerance.

| Order No. | Description                       | List     |
|-----------|-----------------------------------|----------|
| 06AGL011  | SPC DIGIMATIC Cable, TYPE S1 (1M) | \$98.00  |
| 264-020   | USB INPUT TOOL                    | \$285.00 |


\* SPC Cable and Input Tool are both required



**Excel®**  
Send data directly into existing forms

**ITPak 3.0 Freeware**  
Read/Write Data and set Parameters

**MeasurLink® 10.4** (see page 29)  
Data Management & SPC Software

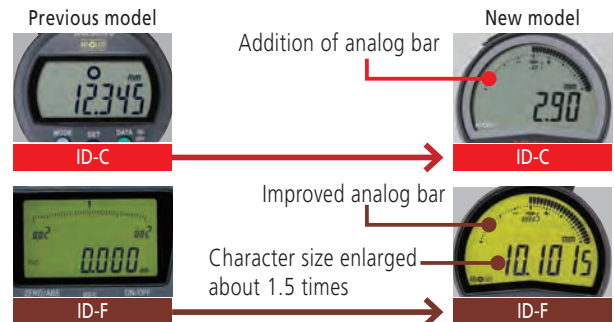

### ID-C Series - Battery Operated

| Order No. |           | Range         | Resolution                                                           | Maximum Permissible Error |                             |                                | Measuring for MPL (N) | Interface   | Net mass (g) |           | List       | Promo    |          |
|-----------|-----------|---------------|----------------------------------------------------------------------|---------------------------|-----------------------------|--------------------------------|-----------------------|-------------|--------------|-----------|------------|----------|----------|
| With Lug  | Flat Back |               |                                                                      | MPE <sub>E</sub>          | Hysteresis MPE <sub>H</sub> | Repeatability MPE <sub>R</sub> |                       |             | With Lug     | Flat Back |            |          |          |
| 543-702   | 543-702B  | 0.5" / 12.7mm | 0.00002" / .00005" / 0.0001" / 0.0005" / 0.0005mm / 0.001mm / 0.01mm | ± 0.00012" / 0.002mm      | 0.00008" / 0.002mm          | 0.00008" / 0.002mm             | 1.5 or less           | d1/d2/S1    | 195          | 165       | \$626.25   | \$563.63 |          |
| 543-707   | 543-707B  | 0.5" / 12.7mm |                                                                      |                           |                             |                                | 0.4 to 0.7            | d1/d2/S1    | 190          | 160       | \$939.00   | \$845.10 |          |
| -         | 543-722B  | 1" / 25.4mm   |                                                                      |                           |                             |                                | 1.8 or less           | d1/d2/S1    | -            | 195       | \$671.00   | \$603.90 |          |
| -         | 543-732B  | 2" / 50.8mm   |                                                                      | ± 0.0002" / 0.005mm       |                             |                                | 2.3 or less           | d1/d2/S1    | -            | 260       | \$1,050.00 | \$945.00 |          |
| 543-712   | 543-712B  | 0.5" / 12.7mm | 0.0005" / 0.01mm                                                     | ± 0.001" / 0.02mm         | 0.001" / 0.02mm             | 0.0005" / 0.01mm               | 0.9 or less           | d1/S1       | 190          | 160       | \$438.00   | \$394.20 |          |
| 543-717   | 543-717B  | 0.5" / 12.7mm |                                                                      |                           |                             |                                |                       | 0.2 to 0.5  | d1/S1        | 185       | 155        | \$613.00 | \$551.70 |
| -         | 543-727B  | 1" / 25.4mm   |                                                                      |                           |                             |                                |                       | 1.8 or less | d1/S1        | -         | 190        | \$671.00 | \$603.90 |
| -         | 543-737B  | 2" / 50.8mm   |                                                                      |                           |                             |                                | ± 0.0015" / 0.04mm    | 2.3 or less | d1/S1        | -         | 245        | \$880.00 | \$792.00 |

### ID-F Series - AC Powered - Green/Red Backlit Display

| Order No. |            | Range         | Resolution                                                                                | Maximum Permissible Error |                             |                                | Measuring for MPL (N) | Interface | List       | Promo      |
|-----------|------------|---------------|-------------------------------------------------------------------------------------------|---------------------------|-----------------------------|--------------------------------|-----------------------|-----------|------------|------------|
| With Lug  | Flat Back  |               |                                                                                           | MPE <sub>E</sub>          | Hysteresis MPE <sub>H</sub> | Repeatability MPE <sub>s</sub> |                       |           |            |            |
| 543-856-A | 543-856B-A | 0.5" / 12.7mm | 0.005mm / 0.001mm / 0.01 mm / 0.00002" / .00005" / 0.0001" / 0.0005"/ 0.001" (selectable) | ± 0.0001" / 0.0025mm      | 0.00008" / 0.002mm          | 0.00008" / 0.002mm             | 1.5 or less           | d1/d2/S1  | \$675.00   | \$607.50   |
| -         | 543-852A   | 1" / 25.4mm   |                                                                                           |                           |                             |                                | 1.8 or less           | d1/d2/S1  | \$1,008.00 | \$978.00   |
| -         | 543-854A   | 2" / 50.8mm   |                                                                                           | ± 0.00016" / 0.004mm      |                             |                                | 2.3 or less           | d1/d2/S1  | \$1,147.00 | \$1,090.00 |
| -         | 543-858A   |               |                                                                                           | ± 0.00012" / 0.003mm      |                             |                                | 2.3 or less           | d1/d2/S1  | \$1,095.00 | \$1,062.00 |

Prices effective October 1 through December 23, 2025

10%  
OFF

All prices are in Canadian Dollars

## Dial Test Indicators



513-404-10E  
Standard

.000050" / 50μinch model now available!

- > One-piece movement assembly for improved durability & impact resistance.
- > Contact point length shown on dial face.
- > Certificate of Inspection included.
- > Shows results from both measuring directions.
- > Resilient crystal with high resistance to glare, scratches and impact.




Contact point length is printed on dial face to avoid accuracy issues

| Part #                                     | Range        | Graduations    | Set Type | Face Color   | List     | Promo    | Remarks     |
|--------------------------------------------|--------------|----------------|----------|--------------|----------|----------|-------------|
| Standard                                   |              |                |          |              |          |          |             |
| 513-407-10E                                | .008"        | .00005"        | Basic    | White        | \$264.00 | \$237.60 | Fine grads  |
| 513-407-10T                                | .008"        | .00005"        | Full     | White        | \$310.00 | \$279.00 | Fine grads  |
| 513-401-10E                                | .14mm        | 0.001mm        | Basic    | Yellow       | \$314.00 | \$282.60 |             |
| 513-402-10E                                | .03"         | .0005"         | Basic    | White        | \$173.00 | \$155.70 |             |
| 513-402-10T                                | .03"         | .0005"         | Full     | White        | \$194.00 | \$174.60 |             |
| 513-403-10E                                | .008"        | .0001"         | Basic    | White        | \$201.00 | \$180.90 |             |
| 513-403-10T                                | .008"        | .0001"         | Full     | White        | \$281.00 | \$252.90 |             |
| 513-404-10E                                | 0.8mm        | 0.01mm         | Basic    | Yellow       | \$187.00 | \$168.30 |             |
| 513-404-10A                                | 0.8mm        | 0.01mm         | Plus     | Yellow       | \$206.00 | \$185.40 |             |
| 513-404-10T                                | 0.8mm        | 0.01mm         | Full     | Yellow       | \$220.00 | \$198.00 |             |
| 513-405-10E                                | 0.2mm        | 0.002mm        | Basic    | Yellow       | \$208.00 | \$187.20 |             |
| 513-405-10T                                | 0.2mm        | 0.002mm        | Full     | Yellow       | \$271.00 | \$243.90 |             |
| 513-406-10E                                | .03"/0.7mm   | .0005"/0.01mm  | Basic    | White/Yellow | \$216.00 | \$194.40 | Dual dial   |
| 513-406-10T                                | .03"/0.7mm   | .0005"/0.01mm  | Full     | White/Yellow | \$239.00 | \$215.10 | Dual dial   |
| 513-409-10E                                | 0.2mm/.0076" | 0.002mm/.0001" | Basic    | Yellow/White | \$277.00 | \$249.30 | Dual dial   |
| 513-409-10T                                | 0.2mm/.0076" | 0.002mm/.0001" | Full     | Yellow/White | \$282.00 | \$253.80 | Dual dial   |
| 513-412-10E                                | .03"         | .0005"         | Basic    | White        | \$264.00 | \$237.60 |             |
| 513-412-10T                                | .03"         | .0005"         | Full     | White        | \$304.00 | \$273.60 |             |
| 513-415-10E                                | 1.0mm        | 0.01mm         | Basic    | Yellow       | \$199.00 | \$179.10 | Long stylus |
| 513-415-10H                                | 1.0mm        | 0.01mm         | Basic    | Yellow       | \$217.00 | \$195.30 | Long stylus |
| Ruby Tip                                   |              |                |          |              |          |          |             |
| 513-472-10E                                | .03"         | .0005"         | Basic    | White        | \$206.00 | \$185.40 |             |
| 513-479-10E                                | .03"         | .0005"         | Basic    | White        | \$217.00 | \$195.30 | Long stylus |
| Standard (20° tilted face)                 |              |                |          |              |          |          |             |
| 513-442-10A                                | .06"         | .0005"         | Basic    | White        | \$249.00 | \$224.10 |             |
| 513-442-10T                                | .06"         | .0005"         | Full     | White        | \$282.00 | \$253.80 |             |
| 513-442-16A                                | .06"         | .0005"         | Basic    | Black        | \$249.00 | \$224.10 |             |
| 513-442-16T                                | .06"         | .0005"         | Full     | Black        | \$282.00 | \$253.80 |             |
| 513-446-16A                                | .06"         | .0005"         | Basic    | Black        | \$333.00 | \$299.70 | Long stylus |
| 513-446-16T                                | .06"         | .0005"         | Full     | Black        | \$376.00 | \$338.40 | Long stylus |
| 513-446-10A                                | .06"         | .0005"         | Basic    | White        | \$333.00 | \$299.70 | Long stylus |
| 513-446-10T                                | .06"         | .0005"         | Full     | White        | \$376.00 | \$338.40 | Long stylus |
| 513-443-10A                                | .016"        | .0001"         | Basic    | White        | \$314.00 | \$282.60 |             |
| 513-443-10T                                | .016"        | .0001"         | Full     | White        | \$356.00 | \$320.40 |             |
| Vertical: dial is on the top of the frame  |              |                |          |              |          |          |             |
| 513-452-10E                                | .03"         | .0005"         | Basic    | White        | \$238.00 | \$214.20 |             |
| 513-452-10T                                | .03"         | .0005"         | Full     | White        | \$264.00 | \$237.60 |             |
| 513-453-10E                                | .008"        | .0001"         | Basic    | White        | \$284.00 | \$255.60 |             |
| Parallel: dial is on the side of the frame |              |                |          |              |          |          |             |
| 513-485-10E                                | 0.2mm        | 0.002mm        | Basic    | Yellow       | \$304.00 | \$273.60 |             |

## Set Configuration


Inch

Full set



T set

Basic set



E, A set


Metric

Full set



T set


Plus set



A set

C set  
(ø 6 Stem)

Basic set



E set

H set  
(ø 6 Stem)

All prices are in Canadian Dollars

## Calculation-Type Digimatic Indicator ID-C

- Calculation-type Digimatic Indicator features both a key lock and parameter lock.
- Fast measurement frequency up to 50 per second.
- An analog bar provides easy-to-read values when scanning for Max, Min and TIR Values.
- Improved parameter setting software makes it even easier to set all of the available parameters to determine and upload the proper coefficients for calculation. (optional) 21EZA313
- The ABSOLUTE Digimatic indicator performs internal calculations using the formula  $Ax+B+Cx-1$  (assuming spindle displacement as x), while the specified

coefficients A, B and C can be set with respect to the purpose of measurement or dimensions of the fixtures. This unique feature allows for reading measurements directly without searching for conversions.



Custom fixture shown

**SPC**  
**ABSOLUTE**

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

**10% OFF**



543-342B-10

| Order No.   | Resolution                                          | Range      | Accuracy         | Measuring Force | List     | Promo           |
|-------------|-----------------------------------------------------|------------|------------------|-----------------|----------|-----------------|
| 543-342B-10 | .00005/.0001/.0005"<br>(0.001/0.01mm)<br>Selectable | .5"/12.7mm | ±.00010"/0.003mm | 1.5N or less    | \$653.00 | <b>\$587.70</b> |

Stem dia. 3/8" #4-48 UNF Thread

SPC cable – 1m: 905338 2m: 905409

## Bore Gage ABSOLUTE Digimatic Indicator ID-C



Installed on optional bore gage probe (page 12)

- Hold automatically picks up hole diameter after a sweep.
- Bore Gage Digimatic Indicator features both a key lock and parameter lock.
- Fast measurement frequency up to 50 per second.
- Analog bar provides easy-to-read values when scanning for Max, Min and TIR values.
- Up to three sets of master values and upper/lower tolerance values can be stored.

- GO/NO-GO judgment
- Employing the ABSOLUTE linear encoder, the ID-C always displays the spindle ABSOLUTE Position from the origin at power-on.
- Improved parameter setting software makes it even easier to set all of the available parameters to determine and upload the proper coefficients for calculation. (optional) 21EZA313

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

**10% OFF**



543-312B-10

| Order No.   | Resolution                                       | Range      | Accuracy         | Measuring Force | List     | Promo           |
|-------------|--------------------------------------------------|------------|------------------|-----------------|----------|-----------------|
| 543-312B-10 | .00005/.0001/.0005"<br>(0.001/0.01mm) Selectable | .5"/12.7mm | ±.00010"/0.003mm | 1.5N or less    | \$629.00 | <b>\$566.10</b> |

SPC cable – 1m: 905338 2m: 905409

## Peak Hold ABSOLUTE Digimatic Indicator ID-C

With Max./Min. Value Holding Function

- Peak Hold Digimatic Indicator features both a Key Lock and Parameter Lock.
- An analog bar provides easy-to-read values when scanning for Max, Min and TIR Values.
- GO/NO-GO judgment
- The maximum, minimum or runout value can be displayed during measurement.

- Fast measurement frequency up to 50 per second.
- Employing the ABSOLUTE linear encoder, the Signal ID-C always displays the spindle ABSOLUTE Position from the origin at power-on.
- Improved parameter setting software makes it even easier to set all of the available parameters and then determine and upload the proper coefficients for calculation. (optional) 21EZA313

**15% OFF**



543-302B-10

| Order No.                               | Resolution                          | Range      | Accuracy         | Remarks   | List     | Promo           |
|-----------------------------------------|-------------------------------------|------------|------------------|-----------|----------|-----------------|
| <b>Stem dia. 3/8", #4-48 UNF Thread</b> |                                     |            |                  |           |          |                 |
| 543-302-10                              | .00005/.0001/.0005"<br>0.001/0.01mm | .5"/12.7mm | ±.00010"/0.003mm | w/lug     | \$629.00 | <b>\$534.65</b> |
| 543-302B-10                             | Selectable                          | .5"/12.7mm | ±.00010"/0.003mm | Flat-back | \$629.00 | <b>\$534.65</b> |

SPC cable – 1m: 905338 2m: 905409

**SPC**  
**ABSOLUTE**

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

Prices effective October 1 through December 23, 2025

## Digimatic Indicator ID-H

### Remote Programming Capable

- This digital indicator offers excellent accuracy and functionality with an easy-to-read display. Take advantage of its high accuracy, backed up by 0.5µm / .00002" resolution, remote control functionality via a handheld controller (or an RS-232C interface) and easy runout measurements with the analog bar display.
- With RS-232C input/output
- The maximum, minimum or runout value can be displayed during measurement.
- GO/NO-GO judgment is performed by setting the upper and lower tolerances. If a judgment result is out of tolerance, the display backlighting changes from green to red, so tolerance judgment can be made at a glance.

Stem dia. 3/8" #4-48 UNF Thread

| Order No. | Resolution                                     | Range         | Model    | Accuracy | List       | Promo             |
|-----------|------------------------------------------------|---------------|----------|----------|------------|-------------------|
| 543-562A  | .00002", .00005", .0001",<br>0.0005mm, 0.001mm | 1.2" / 30.4mm | ID-H530E | 0.0015mm | \$1,250.00 | <b>\$1,125.00</b> |
| 543-564A  |                                                | 2.4" / 60.9mm | ID-H560E | 0.0025mm | \$1,489.00 | <b>\$1,340.10</b> |

SPC cable – 1m: 936937 2m: 965014



## ABSOLUTE Digimatic Indicator ID-S

- Employing the ABSOLUTE linear encoder, the ID-S always displays the spindle ABSOLUTE Position from the origin at power-on. Also, unlimited response speed eliminates overspeed errors.
- Dust/water protection level: IP42 (IP53: 543-796B-10).
- SPC data output



| Order No.                        | Resolution      | Range        | Accuracy | Measuring force | Remarks      | List     | Promo           |
|----------------------------------|-----------------|--------------|----------|-----------------|--------------|----------|-----------------|
| Stem dia. 3/8", #4-48 UNF Thread |                 |              |          |                 |              |          |                 |
| 543-792-10                       | .00005"/0.001mm | .5" / 12.7mm | ±.0001"  | 1.5N or less    | w/ lug back  | \$388.00 | <b>\$349.20</b> |
| 543-796-10                       | .00005"/0.001mm | .5" / 12.7mm | ±.0001"  | 2.5N or less    | w/ lug-back  | \$427.00 | <b>\$384.30</b> |
| 543-793-10                       | .0001"/0.001mm  | .5" / 12.7mm | ±.0001"  | 1.5N or less    | w/ lug back  | \$388.00 | <b>\$349.20</b> |
| 543-783-10                       | .0005"/0.01mm   | .5" / 12.7mm | ±.0010"  | 1.5N or less    | w/ lug-back  | \$250.00 | <b>\$225.00</b> |
| 543-792B-10                      | .00005"/0.001mm | .5" / 12.7mm | ±.0001"  | 1.5N or less    | w/ flat back | \$388.00 | <b>\$349.20</b> |
| 543-796B-10                      | .00005"/0.001mm | .5" / 12.7mm | ±.0001"  | 2.5N or less    | w/ flat-back | \$462.00 | <b>\$415.80</b> |
| 543-793B-10                      | .00005"/0.001mm | .5" / 12.7mm | ±.0001"  | 1.5N or less    | w/ flat back | \$388.00 | <b>\$349.20</b> |
| 543-783B-10                      | .0005"/0.01mm   | .5" / 12.7mm | ±.0010"  | 1.5N or less    | w/ flat-back | \$250.00 | <b>\$225.00</b> |

## ABSOLUTE Digimatic Indicator ID-U

- Economical, Slim digital indicator.
- Large LCD and simple key operation.
- Ideal for installation into measuring devices because of its compact design and long battery life.
- Employing the ABSOLUTE linear encoder, the ID-U always displays the spindle ABSOLUTE position from the origin at power-on. Also, unlimited response speed eliminates overspeed errors.
- Long stem for mounting.



| Order No. | Resolution    | Range       | Model     | Accuracy | Measuring force | List     | Promo           |
|-----------|---------------|-------------|-----------|----------|-----------------|----------|-----------------|
| 575-123   | .0005"/0.01mm | 1" / 25.4mm | ID-U1025E | .0008"   | 1.8N or less    | \$276.00 | <b>\$248.40</b> |

SPC cable – 1m: 905338 2m: 905409

All prices are in Canadian Dollars

## Series Two Dial Indicators

- Improved impact- and oil-resistant materials are employed in the bezel. The improved shape of the crystal face helps with easier measurement readings.
- High-strength, heat-treated stainless steel spindles for longevity.
- Scratch- and chemical-resistant hard-coated crystals.
- Increased rigidity in the bearing plate for reducing the retracing error (20%), and 4-screw mounting for greater impact resistance.
- Inspection certificate included.
- No through screw-holes on the frame for high oil- and dust-resistance. The bezel clamp (optional) can be attached either to the right or left side.



Revolutionary stem-bushing design for trouble-free stem clamping (longer clamping range; maximum tightening torque at the clamping point with M5 screw: 150N•cm).

**10% OFF**



2803A-10

2424A-19

| Order No. | Graduation | Range | Range/Rev | Type  | Dial Reading | Accuracy First 2.5 Rev/Overall | Force        | List     | Promo           |
|-----------|------------|-------|-----------|-------|--------------|--------------------------------|--------------|----------|-----------------|
| 2358A-10* | .0001"     | .5"   | .01"      | w/lug | 0-10         | .0001 / .0008                  | 2.0N or less | \$313.00 | <b>\$281.70</b> |
| 2803A-10* | .0001"     | .025" | .01"      | w/lug | 0-5-0        | .0001 / .0001                  | 2.5N or less | \$227.00 | <b>\$204.30</b> |
| 2416A-10* | .001"      | 1"    | .1"       | w/lug | 0-100        | .001 / .002                    | 1.8N or less | \$176.00 | <b>\$158.40</b> |
| 2424A-19* | .001"      | 2"    | 1"        | w/lug | 0-100        | .001 / .003                    | 2.5N or less | \$343.00 | <b>\$308.70</b> |
| 2776A     | .0005"     | 1"    | .05"      | w/lug | 0-50         | .0005 / .002                   | 2.5N or less | \$179.00 | <b>\$161.10</b> |

\*Jeweled bearing model

## Bore Gages

- Carbide-tipped contact points for durability.
- The dial indicator is fully protected by a rugged cover.
- Optional extension rods can be attached for measuring deep holes.
- The grip minimizes the variation of measurements by reducing heat transfer from the operator's hand.




511-751-20

| Order No.         | Range      | Graduation                                                           | Anvils            | Spacers | List       | Promo    |
|-------------------|------------|----------------------------------------------------------------------|-------------------|---------|------------|----------|
| With Indicator    |            |                                                                      |                   |         |            |          |
| 511-751-20        | .7 - 1.4"  | .0001"<br>(2923B-10)                                                 | 9                 | 2       | \$524.00   | \$471.60 |
| 511-752-20        | 1.4 - 2.5" |                                                                      | 6                 | 4       | \$576.00   | \$518.40 |
| 511-753-20        | 2.0 - 6.0" |                                                                      | 11 (2" sub anvil) | 4       | \$565.00   | \$508.50 |
| 511-754-20        | 4.0 - 6.5" |                                                                      | 13                | 4       | \$840.00   | \$756.00 |
| 511-755-20        | 6.5 - 10"  |                                                                      | 6                 | 7       | \$925.00   | \$832.50 |
| 511-756-20        | 10 - 16"   |                                                                      | 5 (3" sub anvil)  | 7       | \$1,099.00 | \$989.10 |
| Without Indicator |            |                                                                      |                   |         |            |          |
| 511-731           | .7 - 1.4"  | Indicator optional<br><br>Protective<br>Cover optional<br>(21DZA000) | 9                 | 2       | \$370.00   | \$333.00 |
| 511-732           | 1.4 - 2.5" |                                                                      | 6                 | 4       | \$380.00   | \$342.00 |
| 511-733           | 2.0 - 6.0" |                                                                      | 11 (2" sub anvil) | 4       | \$410.00   | \$369.00 |
| 511-734           | 4.0 - 6.5" |                                                                      | 13                | 4       | \$613.00   | \$551.70 |
| 511-735           | 6.5 - 10"  |                                                                      | 6                 | 7       | \$719.00   | \$647.10 |
| 511-736           | 10 - 16"   |                                                                      | 5 (3" sub anvil)  | 7       | \$903.00   | \$812.70 |



**10% OFF**



See Digimatic indicators made specifically for bore gages (page 10).

Prices effective October 1 through December 23, 2025

## Holtest

- Titanium-coated measuring pins provide excellent durability and impact resistance while allowing the instrument to measure close to the bottom of blind holes.
- Three-point design ensures self-centering action for stable measurements in the range above .275" bore diameter.
- With ratchet stop for consistent force.

## Holtest Type II


- Holtest Type II models are also available. These lower-costs units have solid, hardened alloy steel anvils.

### Mechanical Holtests – Individual Units

| Order No. | Description/Range       | List       | Promo      |
|-----------|-------------------------|------------|------------|
| 368-021   | Holtest, 0.08" - 0.1"   | \$2,113.00 | \$1,690.40 |
| 368-022   | Holtest, 0.1" - 0.12"   | \$2,113.00 | \$1,690.40 |
| 368-023   | Holtest, 0.12" - 0.16"  | \$1,705.00 | \$1,364.00 |
| 368-024   | Holtest, 0.16" - 0.2"   | \$1,705.00 | \$1,364.00 |
| 368-025   | Holtest, 0.2" - 0.24"   | \$1,705.00 | \$1,364.00 |
| 368-026   | Holtest, 0.24" - 0.28"  | \$1,705.00 | \$1,364.00 |
| 368-261   | Holtest, 0.275" - 0.35" | \$844.00   | \$675.20   |
| 368-262   | Holtest, 0.35" - 0.425" | \$844.00   | \$675.20   |
| 368-263   | Holtest, 0.425" - 0.5"  | \$844.00   | \$675.20   |
| 368-264   | Holtest, 0.5" - 0.65"   | \$874.00   | \$699.20   |
| 368-265   | Holtest, 0.65" - 0.8"   | \$874.00   | \$699.20   |
| 368-266   | Holtest, 0.8" - 1.0"    | \$909.00   | \$727.20   |
| 368-267   | Holtest, 1.0" - 1.2"    | \$909.00   | \$727.20   |
| 368-268   | Holtest, 1.2" - 1.6"    | \$1,135.00 | \$908.00   |
| 368-269   | Holtest, 1.6" - 2.0"    | \$1,197.00 | \$957.60   |
| 368-270   | Holtest, 2.0" - 2.5"    | \$1,204.00 | \$963.20   |
| 368-271   | Holtest, 2.5" - 3.0"    | \$1,307.00 | \$1,045.60 |
| 368-272   | Holtest, 3.0" - 3.5"    | \$1,343.00 | \$1,074.40 |
| 368-273   | Holtest, 3.5" - 4.0"    | \$1,405.00 | \$1,124.00 |
| 368-274   | Holtest, 4.0" - 5.0"    | \$1,803.00 | \$1,442.40 |
| 368-275   | Holtest, 5.0" - 6.0"    | \$2,043.00 | \$1,634.40 |
| 368-276   | Holtest, 6.0" - 7.0"    | \$2,099.00 | \$1,679.20 |
| 368-277   | Holtest, 7.0" - 8.0"    | \$2,169.00 | \$1,735.20 |
| 368-278   | Holtest, 8.0" - 9.0"    | \$2,465.00 | \$1,972.00 |
| 368-279   | Holtest, 9.0" - 10"     | \$2,762.00 | \$2,209.60 |
| 368-280   | Holtest, 10" - 11"      | \$2,789.00 | \$2,231.20 |
| 368-281   | Holtest, 11" - 12"      | \$2,860.00 | \$2,288.00 |


### Mechanical Holtests – Complete Unit Sets

| Order No. | Description/Range              | List        | Promo      |
|-----------|--------------------------------|-------------|------------|
| 368-916   | Holtest, Set, 0.275" - 0.5"*   | \$3,114.00  | \$2,491.20 |
| 368-917   | Holtest, Set, 0.5" - 0.8"*     | \$2,099.00  | \$1,679.20 |
| 368-918   | Holtest, Set, 0.8" - 2.0"*     | \$4,804.00  | \$3,843.20 |
| 368-919   | Holtest, Set, 2.0" - 4.0"*     | \$6,847.00  | \$5,477.60 |
| 368-920   | Holtest, Set, 4.0" - 8.0"*     | \$10,479.00 | \$8,383.20 |
| 368-926   | Holtest, 2pc Set, .08" - .12"* | \$4,493.00  | \$3,594.40 |
| 368-927   | Holtest, 4pc Set, .12" - .28"* | \$7,170.00  | \$5,736.00 |



### Measuring a Blind Hole

The measuring contact points held in the jaws permit measuring the diameter of a blind hole to the bottom. (up to 100mm / 4" models)



### Measuring Deep Holes

An extension tube (optional accessory) can be fitted to enable measurement of deep holes.

| Range                 | a    | b   | c    |
|-----------------------|------|-----|------|
| 6 - 12mm / .275 - .5" | 2    | —   | 2.5  |
| 12 - 20mm / .5 - .8"  | 0.3  | 5.6 | 3.5  |
| 20 - 30mm / .8 - 1.2" | 0.3  | 8.3 | 5.2  |
| 30 - 50mm / 1.2 - 2"  | 0.3  | 13  | 10   |
| 50 - 100mm / 2 - 4"   | 0.3  | 17  | 14   |
| 100 - 300mm / 4 - 12" | 12.4 | 21  | 13.8 |




TiN coated contact points



### Inspection Certificate Supplied as Standard

An Inspection Certificate is supplied with each instrument, which assures product quality and safety. On request, Mitutoyo can issue a Calibration Certificate, at a cost, from our accredited calibration laboratory.

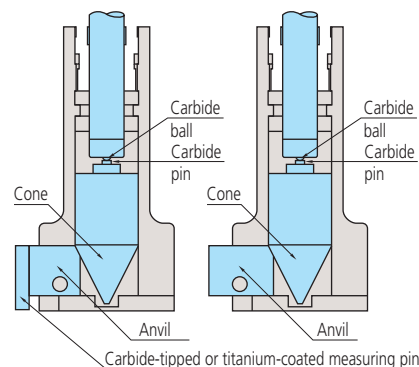

## Digimatic Holtest

- Titanium-coated measuring pins provide excellent durability and impact resistance while allowing the instrument to measure close to the bottom of blind holes.
- Large LCD readout.
- Functions available: Presetting, Zero/ABS, Auto power On/Off, Data hold, Data output, Error alarm, Battery replacement alarm.
- With ratchet stop for consistent force.
- Measure deep holes by attaching an extension rod (optional).
- Setting rings are included in sets, but optional for individual gages.
- Supplied in fitted plastic case up to 4"/100mm. Over 4"/100mm supplied in wooden case.
- Resolution: .00005"/0.001mm (over 4" models: .0001"/0.001mm)

### Digimatic Holtests – Individual Units

| Order No. | Range                           | List       | Promo             |
|-----------|---------------------------------|------------|-------------------|
| 468-261   | Digimatic Holtest, .275" - .35" | \$1,564.00 | <b>\$1,251.20</b> |
| 468-262   | Digimatic Holtest, .35" - .425" | \$1,564.00 | <b>\$1,251.20</b> |
| 468-263   | Digimatic Holtest, .425" - .5"  | \$1,578.00 | <b>\$1,262.40</b> |
| 468-264   | Digimatic Holtest, 0.5" - 0.65" | \$1,718.00 | <b>\$1,374.40</b> |
| 468-265   | Digimatic Holtest, 0.65" - 0.8" | \$1,718.00 | <b>\$1,374.40</b> |
| 468-266   | Digimatic Holtest, 0.8" - 1"    | \$1,761.00 | <b>\$1,408.80</b> |
| 468-267   | Digimatic Holtest, 1.0" - 1.2"  | \$1,761.00 | <b>\$1,408.80</b> |
| 468-268   | Digimatic Holtest, 1.2" - 1.6"  | \$1,803.00 | <b>\$1,442.40</b> |
| 468-269   | Digimatic Holtest, 1.6" - 2.0"  | \$1,817.00 | <b>\$1,453.60</b> |
| 468-270   | Digimatic Holtest, 2" - 2.5"    | \$1,972.00 | <b>\$1,577.60</b> |
| 468-271   | Digimatic Holtest, 2.5" - 3"    | \$1,972.00 | <b>\$1,577.60</b> |
| 468-272   | Digimatic Holtest, 3" - 3.5"    | \$2,000.00 | <b>\$1,600.00</b> |
| 468-273   | Digimatic Holtest, 3.5" - 4"    | \$2,028.00 | <b>\$1,622.40</b> |
| 468-274   | Digimatic Holtest, 4" - 5"      | \$2,649.00 | <b>\$2,119.20</b> |
| 468-275   | Digimatic Holtest, 5" - 6"      | \$2,719.00 | <b>\$2,175.20</b> |
| 468-276   | Digimatic Holtest, 6" - 7"      | \$2,888.00 | <b>\$2,310.40</b> |
| 468-277   | Digimatic Holtest, 7" - 8"      | \$3,014.00 | <b>\$2,411.20</b> |
| 468-278   | Digimatic Holtest, 8" - 9"      | \$3,212.00 | <b>\$2,569.60</b> |
| 468-279   | Digimatic Holtest, 9" - 10"     | \$3,282.00 | <b>\$2,625.60</b> |
| 468-280   | Digimatic Holtest, 10" - 11"    | \$3,395.00 | <b>\$2,716.00</b> |
| 468-281   | Digimatic Holtest, 11" - 12"    | \$3,550.00 | <b>\$2,840.00</b> |

### Digimatic Holtests – Interchangeable Head Sets

| Order No. | Range                                      | List       | Promo             |
|-----------|--------------------------------------------|------------|-------------------|
| 468-976   | Digimatic Holtest Head Set, 0.275" - 0.5"* | \$2,860.00 | <b>\$2,288.00</b> |
| 468-977   | Digimatic Holtest, Head Set, 0.5" - 0.8"*  | \$2,324.00 | <b>\$1,859.20</b> |
| 468-978   | Digimatic Holtest, Head Set, 0.8" - 2"*    | \$5,617.00 | <b>\$4,493.60</b> |
| 468-979   | Digimatic Holtest, Head Set, 2" - 4"*      | \$6,649.00 | <b>\$5,319.20</b> |
| 468-980   | Digimatic Holtest, Head Set, 4" - 8"*      | \$7,804.00 | <b>\$6,243.20</b> |

### Digimatic Holtests – Complete Unit Sets

| Order No. | Range                                       | List       | Promo             |
|-----------|---------------------------------------------|------------|-------------------|
| 468-986   | Digimatic Holtest, Unit-Set, 0.275" - 0.5"* | \$5,579.00 | <b>\$4,463.20</b> |
| 468-987   | Digimatic Holtest, Unit-Set, 0.5" - 1"*     | \$5,917.00 | <b>\$4,733.60</b> |
| 468-988   | Digimatic Holtest, Unit-Set, 1" - 2"*       | \$6,706.00 | <b>\$5,364.80</b> |
| 468-989   | Digimatic Holtest, Unit-Set, 2" - 3"*       | \$7,352.00 | <b>\$5,881.60</b> |
| 468-990   | Digimatic Holtest, Unit-Set, 3" - 4"*       | \$7,606.00 | <b>\$6,084.80</b> |

Prices effective October 1 through December 23, 2025



### Measuring Deep Holes

An extension rod (optional accessory) can be fitted to provide measurement of deep holes.



Complete-Unit Set



Interchangeable-Head Set

## Borematic

### Quick, spring-loaded lever action/movement

- Titanium-coated measuring pins provide excellent durability and impact resistance while allowing the instrument to measure close to the bottom of blind holes.
- Digital display with quick-action lever operation enables quick and easy measurement.
- Built-in ABSOLUTE System eliminates the need to set the origin point every time the unit is turned on. The system is immune to over-speed errors, thus increasing the reliability of measurement.
- The Digimatic Borematic is compatible with statistical process control systems and measurement support systems.
- Built-in tolerance judgment function allows GO/NO-GO judgment based on user-defined upper and lower limit settings.

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

**ABSOLUTE**

**SPC**

Individual Gages: includes one digital display unit and one interchangeable measuring head (plus adapter if required)

| Order No | Size Range      | Accuracy            | Extension Rod  | List       | Promo      |
|----------|-----------------|---------------------|----------------|------------|------------|
| 568-461  | 0.275" - 0.350" | ±5µm<br>±0.00025 in | 100mm (952322) | \$2,043.00 | \$1,634.40 |
| 568-462  | 0.350" - 0.425" |                     |                | \$2,043.00 | \$1,634.40 |
| 568-463  | 0.425" - 0.500" |                     |                | \$2,043.00 | \$1,634.40 |
| 568-464  | 0.50" - 0.65"   | ±5µm<br>±0.00025 in | 150mm (952621) | \$2,085.00 | \$1,668.00 |
| 568-465  | 0.65" - 0.80"   |                     |                | \$2,039.00 | \$1,631.20 |
| 568-466  | 0.8" - 1.0"     |                     |                | \$2,085.00 | \$1,668.00 |
| 568-467  | 1.0" - 1.2"     | ±6µm<br>±0.0003 in  | 150mm (952622) | \$2,156.00 | \$1,724.80 |
| 568-468  | 1.2" - 1.6"     |                     |                | \$2,395.00 | \$1,916.00 |
| 568-469  | 1.6" - 2.0"     |                     |                | \$2,395.00 | \$1,916.00 |
| 568-470  | 2.0" - 2.5"     |                     | 150mm (952623) | \$2,339.00 | \$1,871.20 |
| 568-471  | 2.5" - 3.0"     |                     |                | \$2,423.00 | \$1,938.40 |
| 568-472  | 3.0" - 3.5"     |                     |                | \$2,465.00 | \$1,972.00 |
| 568-473  | 3.5" - 4.0"     |                     |                | \$2,465.00 | \$1,972.00 |
| 568-474  | 4.0" - 4.5"     |                     |                | \$2,578.00 | \$2,062.40 |
| 568-475  | 4.5" - 5.0"     |                     |                | \$2,719.00 | \$2,175.20 |

Complete Unit Gage Sets: includes several individual gages to cover the overall size range of the set

| Order No | Overall Range | Range of Individual Gages            | Setting Rings           | List       | Promo      |
|----------|---------------|--------------------------------------|-------------------------|------------|------------|
| 568-965  | 0.275" - 0.5" | 0.275-0.35", 0.35-0.425", 0.425-0.5" | 0.35" DIA., 0.425" DIA. | \$7,058.00 | \$5,646.40 |
| 568-966  | 0.5" - 1"     | 0.5-0.65", 0.65-0.8", 0.8-1"         | 0.65" DIA., 0.8" DIA.   | \$7,368.00 | \$5,894.40 |
| 568-967  | 1" - 2"       | 1-1.2", 1.2-1.6", 1.6-2"             | 1.2" DIA., 1.6" DIA.    | \$7,692.00 | \$6,153.60 |
| 568-968  | 2" - 3"       | 2-2.5", 2.5-3"                       | 2.5" DIA.               | \$5,508.00 | \$4,406.40 |
| 568-969  | 3" - 4"       | 3-3.5", 3.5-4"                       | 3.5" DIA.               | \$6,113.00 | \$4,890.40 |

### Interchangeable-Head Sets

| Order No | Overall Range | Range of Individual Gages            | Setting Rings           | List       | Promo      |
|----------|---------------|--------------------------------------|-------------------------|------------|------------|
| 568-928  | 0.275" - 0.5" | 0.275-0.35", 0.35-0.425", 0.425-0.5" | 0.35" DIA., 0.425" DIA. | \$3,142.00 | \$2,513.60 |
| 568-929  | 0.5" - 1"     | 0.5-0.65", 0.65-0.8", 0.8-1"         | 0.65" DIA., 0.8" DIA.   | \$3,564.00 | \$2,851.20 |
| 568-930  | 1" - 2"       | 1-1.2", 1.2-1.6", 1.6-2"             | 1.2" DIA., 1.6" DIA.    | \$4,339.00 | \$3,471.20 |
| 568-936  | 2" - 4"       | 2-2.5", 2.5-3", 3-3.5", 3.5-4"       | 2.5" DIA., 3.5" DIA.    | \$6,254.00 | \$5,003.20 |

Includes one digital display unit with several interchangeable measuring heads (and adapters as required) to cover the total size range plus one extension rod

**20% OFF**



#### Technical Data

Resolution: 0.001mm or 0.00005 in/0.001mm  
 Display: LCD  
 Response speed: Infinite  
 Battery: SR44 (1 pc), 938882, for initial operational checks (standard accessory)  
 Battery life: Approx. 5,000 hours in continuous use  
 Scale type: Electrostatic capacitance ABSOLUTE encoder

#### Functions

GO/NO-GO judgment, GO/NO-GO judgment zoom, 2-Point preset, Zero-setting, Data hold, Error alarm, Low battery voltage alert, Data output, Function lock, 330° Rotary display, inch/mm conversion (inch/mm models)



Complete-Unit Set



Interchangeable-Head Set

All prices are Canadian Dollar

## PH-3515F Profile Projector and 2D Processor Packages

Heavy-Duty, Bench-Top Model with Horizontal Optical System featuring display w/ M2 geometric measuring software

- > ø14" screen, Horizontal Projector
- > 10" x 6" Travel T Slot table for accessories
- > Linear Glass Scales for accurate measurement
- > Profile and Fiber Optic Surface Illumination
- > Digital built-in angle counter
- > Maximum Load 45kg / 100lb
- > Available with M2 or QM Data 2D Processors

| Order No.                                                      | Description                                                      | List        | Promo              |
|----------------------------------------------------------------|------------------------------------------------------------------|-------------|--------------------|
| <b>PH-3515 Main Unit &amp; Digital Readout Packages 5% Off</b> |                                                                  |             |                    |
| M172868-1                                                      | PH-3515F KA Counter PKG # 1                                      | \$16,211.00 | <b>\$15,400.00</b> |
| M172868-2                                                      | PH-3515F QM-DATA PKG # 2                                         | \$18,866.00 | <b>\$17,922.00</b> |
| M172868-3                                                      | PH-3515F QM-DATA/OPT200 PKG # 3                                  | \$21,801.00 | <b>\$20,711.00</b> |
| M172868-4                                                      | PH-3515F - M2 ADD-ON & Touch Screen PC                           | \$21,510.00 | <b>\$20,435.00</b> |
| M172868-5                                                      | PH-3515F - M2 ADD-ON, Touch Screen PC & Automatic Edge Detection | \$23,000.00 | <b>\$21,850.00</b> |
| <b>Machine Stand (Optional)</b>                                |                                                                  |             |                    |
| 64PMI308                                                       | Machine Stand for PH Series                                      | \$1,830.00  | <b>\$1,350.00</b>  |
| 64AAB149                                                       | Tray, Counter, PH-A14/PH-3515                                    | \$206.00    | -                  |

(Includes installation and A2LA accredited calibration)

**5% OFF** 5% off all Main Units



**5% OFF** 5% off all Packages



**FREE SHIPPING** Free Shipping



**Installation & Calibration Included**

172-868-11A-M2

PH-3515 Profile Projector, M2 Software/ Hardware and All-In-One Touchscreen PC



**KA-200 Counter: PH-3515 & PV-5110**

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo



Display unit for X & Y Linear Scales  
> ABSOLUTE and incremental modes (10 presets each)  
> 0.05-.0001mm / .02" - .000005" in resolution  
> Calculator functionality

## Compatible Digital-Read-Out (DRO) Devices

M2 Software & Hardware: PH-3515 & PJ-PLUS



**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo

M2 is a universal 2D coordinate measurement software which has become the preferred software for many optical comparator users due to its intuitive user interface and data collection procedures.

- > Software & All-In-One Touch Screen PC Included
- > Full Integration and A2LA Calibration conducted

### Automatic Edge Detection



Fiber Optic Edge Detection system integrated into M2 software via M2 Communication Unit.  
Intuitive Edge Teach Functionality built into software.  
Allows for continuous measurement of features, while storing data for post process analysis.

## PJ-Plus with M2 2D Processor Packages

The PJ-Plus is a new series of profile projectors offered by Mitutoyo. This system utilizes LED lighting and a fanless design making it ideal for harsh manufacturing facilities or job shops.

| Order No                       | Description                                              | XY Stage       | List            | Promo |
|--------------------------------|----------------------------------------------------------|----------------|-----------------|-------|
| PJ-PLUS Main Units - 5% Off    |                                                          |                |                 |       |
| 302-801-10A                    | PJ-P1010A 4x4"/100x100m                                  | 4x4"/100x100m  | Request a Quote |       |
| 302-802-10A                    | PJ-P2010A 8X4"/200x200mm                                 | 8X4"/200x200mm |                 |       |
| PJ-PLUS & M2 Packages - 5% Off |                                                          |                |                 |       |
| 302-801-10-M2                  | PJ-PLUS 4x4 - M2 and Touchscreen PC Package              | 4x4"/100x100mm | Request a Quote |       |
| 302-801-10-M2-EDGE             | PJ-PLUS 4X4 - M2, Optical Edge Detection and Touchscreen | 4x4"/100x100mm |                 |       |
| 302-802-10-M2                  | PJ-PLUS 8x4 - M2 and Touchscreen PC Package              | 8x4"/200x100mm |                 |       |
| 302-802-10-M2-EDGE             | PJ-PLUS 8x4 - M2, Optical Edge Detection and Touchscreen | 8x4"/200x100mm |                 |       |
| Machine Stand (Optional)       |                                                          |                |                 |       |
| 64PMI167                       | Machine Stand for PJ Series                              |                | Request a Quote |       |

**5% OFF** 5% off all Main Units



**5% OFF** 5% off all Accessory Packages



**FREE SHIPPING** Free Shipping




**Installation & Calibration Included**

302-801-10-M2-EDGE

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo

An XY axis digital counter is built into the PJ-Plus

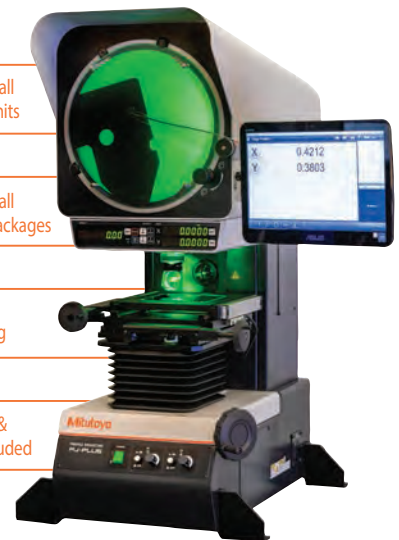

Prices effective October 1 through December 23, 2025

## PV-5110 Vertical (Downward) Profile Projector (5% OFF Main Unit & 5% OFF DRO)

The PV-5110 Profile Projector is a downward optical axis projector fitted with a stable glass stage for delicate item inspection, ensuring accuracy and preventing damage. Its advanced optics and secure platform make it an optimal choice for precise applications, particularly with thin or delicate workpieces.

- > Ø19.4" Screen, Vertical Projector.
- > Downward Optical Axis - Provides improved oblique surface illumination.
- > LED illumination.
- > Built-In Dual Oblique Surface Illumination for improved contrast.

| Order No.                                                       | Description                      | List            | Promo |
|-----------------------------------------------------------------|----------------------------------|-----------------|-------|
| PV-5110 Main Unit & Digital Readout Interface Packages - 5% Off |                                  |                 |       |
| 304-919-11A-KA                                                  | PV-5110 with KA Counter          | Request a Quote |       |
| 304-919-11A-QM                                                  | PV-5110 with QM Data             |                 |       |
| 304-919-11A-QM-OPT                                              | PV-5110 with QM Data and Optoeye |                 |       |

PLEASE NOTE: No stand or elevated surface is required.

**5% OFF** 5% off all Main Units




**5% OFF** 5% off all Packages



**FREE SHIPPING** Free Shipping



**Installation & Calibration Included**



304-919-11A-KA  
PV-5110 with KA Counter

## Additional DRO

QM Data: PH-3515, PJ-PLUS, PV-5110 & PJ-H30



The QM-Data200 unit features the powerful QM 2D coordinate measurement software pre-loaded onto our rugged user interface. The QM-Data200 interface features easy-to-use key operations and allows for measurement results to be visualized on its LCD Display.



Plot Single Data Points




Return 2-Dimensional Graphic and Calculated Values

- > Built-In Guided Measurement Tutorials.
- > Programmable Measurement Procedures & Calculations.
- > Data Collection and USB Output.
- > Full Integration and A2LA Calibration conducted by Mitutoyo Field Service team.

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo

Optoeye-200

Optical Edge Detection  
(Additional Purchase Required)



## PJ-H30 Vertical Profile Projector

The Mitutoyo PJ-H30 is unique given its ability to produce an uninverted image, improving intuitive operation as the projected image appears in the same orientation as the workpiece.

- > Optical system with high NA lenses provides bright and high contrast images
- > The three-lens mounting turret includes a 10X lens as standard
- > Built-in digital XY Counter

303-716-13A &  
264-131-13A-PJH-OPT



**25% OFF**

25% off all Main Units



**5% OFF**

5% off all Accessory Packages



**FREE SHIPPING**

Free Shipping



**Installation & Calibration Included**

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo



303-717-13A PJ-H30A2010B

| Order No.                                                       | Description                               | XY Travel         | List            | Promo |
|-----------------------------------------------------------------|-------------------------------------------|-------------------|-----------------|-------|
| PJ-H30 Main Units - 25% OFF                                     |                                           |                   |                 |       |
| 303-716-13A                                                     | PJ-H30A1010B                              | 4x4"/100x100mm    | Request a Quote |       |
| 303-717-13A                                                     | PJ-H30A2010B                              | 8x4"/200x100mm    |                 |       |
| 303-718-13A                                                     | PJ-H30A2017B                              | 8x6.7"/200x170mm  |                 |       |
| 303-719-13A                                                     | PJ-H310A3017B                             | 12x6.7"/300x170mm |                 |       |
| Digital Readout Interface (Add-On Packages - Optional) - 5% Off |                                           |                   |                 |       |
| 264-161-13A-PJH                                                 | QM-DATA200 Arm Type (PJ-H Series Package) | Request a Quote   |                 |       |
| 264-161-13A-PJH-OPT                                             | QM-DATA200 Arm Type & Optoeye (PJ-H)      |                   |                 |       |
| Machine Stand (Optional)                                        |                                           |                   |                 |       |
| 64PMI167                                                        | Machine Stand for PJ Series               | Request a Quote   |                 |       |



All prices are in Canadian Dollars

## Quick Image

A double telecentric optical system with a large depth of focus, quick release stage, and a large selection of stage sizes make the Quick Image a high-efficiency VMM.

- › Manual or motorized stages available.
- › High pixel count color camera.
- › Automatic part location with pattern search tool.
- › CAD file overlay.
- › Profile of a line built in.
- › Stitching function allows for measurements of parts larger than the field of view.

| Model No. | Package     | Stage Size | List            |
|-----------|-------------|------------|-----------------|
| QI-A1010D | 361-850M3PK | 4" x 4"    | Request a Quote |
| QI-A2010D | 361-851M3PK | 8" x 4"    |                 |
| QI-A2017D | 361-852M3PK | 8" x 7"    |                 |
| QI-A3017D | 361-853M3PK | 12" x 7"   |                 |
| QI-A4020D | 361-854M3PK | 16" x 8"   |                 |

Packages include machine, PC, software, installation, ISO 17025 accredited calibration, and online training  
\* Manual Stage



- Free Shipping
- Installation & Calibration Included
- Online Training Course Included




## M3 Software

An intuitive and thoughtful icon-driven user interface, a flexible probe library, and powerful tolerancing and programming make M3 the perfect solution for the Quick Image system.

- › Includes profile
  - Allows profile of a line comparing measured points to a nominal CAD file
- › Includes DXF overlay
  - Overlay a CAD file, similar to a profile projector overlay
- › Includes image stitching
  - Measure large parts by combining multiple fields of view into a single image
- › Includes pattern search
  - Automatically locate and measure a part regardless of size or orientation
- › Includes program finder
  - Automatically identify a part and load the corresponding part program
- › Includes multi-measure
  - Measure multiple features by drawing a box around them

Prices effective October 1 through December 23, 2025

Errors due to height are greatly minimized with a depth of focus up to 22mm. Measurement errors due to human focusing are eliminated.

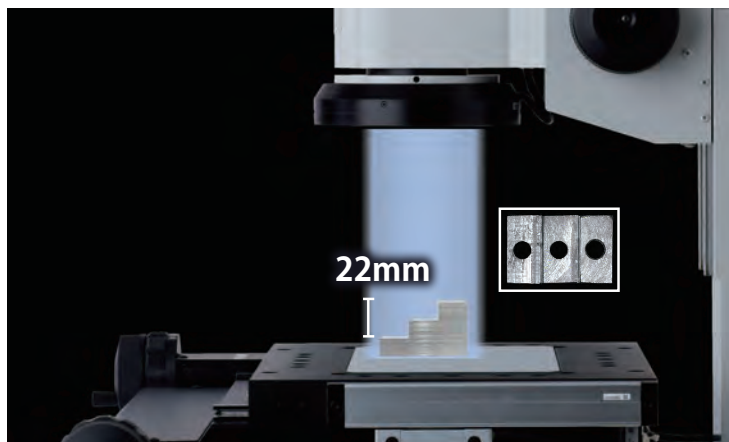

Measuring a stepped workpiece


| Model No. | Package        | Stage Size | List            |
|-----------|----------------|------------|-----------------|
| QI-C2010D | 361-860-11M3PK | 8" x 4"    | Request a Quote |
| QI-C2017D | 361-861-11M3PK | 8" x 7"    |                 |
| QI-C3017D | 361-862-11M3PK | 12" x 7"   |                 |

Packages include machine, PC, software, installation, ISO 17025 accredited calibration, and online training

\* Motorized Stage

## Auto-Recognition

Use pattern search for multiple workpieces within the screen view, and measure them all in one operation with a single touch or mouse click. This eliminates the need for accurate positioning of workpieces and cumbersome setup of fixtures.

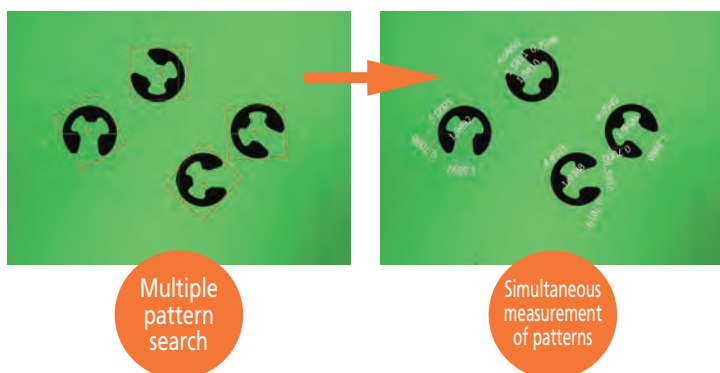

Multiple  
pattern  
search

Simultaneous  
measurement  
of patterns

FREE  
SHIPPING

Free  
Shipping



Installation &  
Calibration Included



Online Training  
Course Included




## Optional Thread Module

Adds the ability to inspect external thread features and quickly calculate the Outside and Root Thread Diameters, the Pitch Diameter, the Lead, and the Root and Crest Truncation values.

| Model No. | Package | List            |
|-----------|---------|-----------------|
| 64VIS002  | LF-TM   | Request a Quote |

\* For M3 software

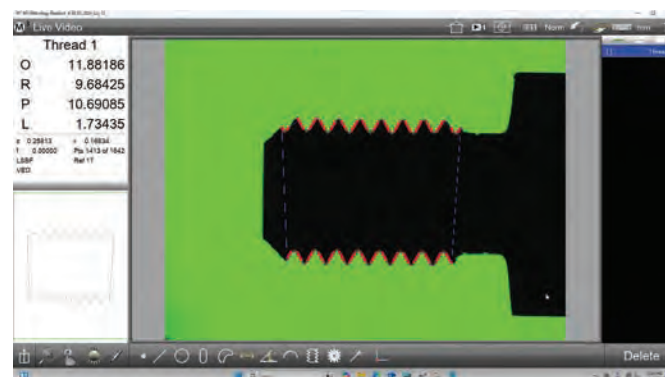

## High-Accuracy Height Gage Linear Height LH-600F/FG

The highest accuracy height gage on the market is now even easier to use.

The Mitutoyo LH-600F Linear Height Measurement System is the latest model in the Mitutoyo Linear Height Gage line, designed to be more user-friendly while maintaining the best-in-class reliability and accuracy of previous models.



### New Features:

- › Rotatable, adjustable touch screen interface.
- › New self-check feature.
- › High-accuracy encoder more resistant to contaminants.
- › Improved 2D mode.
- › Calibration date warning.
- › S1 Digimatic output capable of sending data directly to Excel®, wired or wirelessly.
- › Additional probe and extension options.

### Still Featuring:

- › Resolution down to 0.1µinch (selectable).
- › Highest accuracy in its class  $\pm (1.1+0.6L/600) \mu\text{m}$ .
- › Pneumatic full/semi-float system with built-in compressor.
- › Capable of standard measurements such as heights and diameters or advanced measurements like angles, diagonal distances and perpendicularity (optional probes may be required).
- › The Origin can be set at centerline positions, peaks of radii or simply on the surface plate or gage blocks.

### Perpendicular/straightness measurement - Graph creation



Show results in real time during measurement.



Show results after measurement.



You can monitor the graphs of past measurement results.



Show measurement results in graph form.



Power grip model also available for even easier positioning.

| Order No   | Description                        | Range (Stroke)            | Resolution (selectable)        | List        | Promo       |
|------------|------------------------------------|---------------------------|--------------------------------|-------------|-------------|
| 518-360-13 | LH-600F Inch/mm                    | 977mm (600mm) / 38" (24") | 0.0001/0.001/0.01/0.1mm        | \$12,994.00 | \$11,694.60 |
| 518-361-13 | LH-600FG Inch/mm, Power Grip Model |                           | .0000001/.000001/.00001/.0001" | \$13,593.00 | \$12,233.70 |

Prices effective October 1 through December 23, 2025

\* Must purchase Power Cord 022AA011

## Easy operation using keypad and touch screen navigation

Contextual guidance on the large-screen touch panel supports your measurements.



Simple, straightforward keys with icons

Icons allow the user to find the required operation at a glance.

### Basic measurements



Height (top) measurement



Height (bottom) measurement



Width (inside) measurement



Width (outside) measurement



Shaft (top) measurement



Shaft (bottom) measurement



Circle (shaft) measurement



Max.-Min. (top) measurement



Hole (bottom) measurement



Hole (top) measurement



Circle (hole) measurement



Max.-Min. (bottom) measurement

### Advanced measurement functions



Part program measurement



2D measurement

### Power



Power

### Measurement settings



Measurement origin setting



Probe selection



Measurement origin switching

### Other



Home screen



System settings



Data output

Touch panel with guidance

Measurement guidance is displayed on the large touch panel of the 8.4-inch color LCD, enabling intuitive operation.





Guidance screen



Operable with gloves

## Expanded measurement area

With the new optional probes, you can now measure areas that were beyond the capacity of conventional probes.

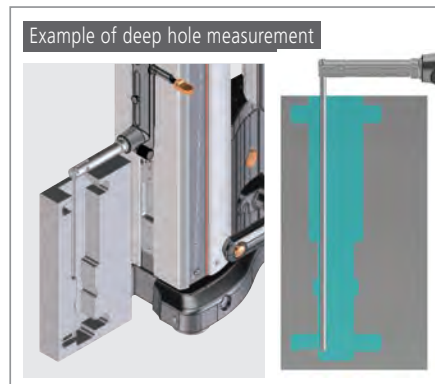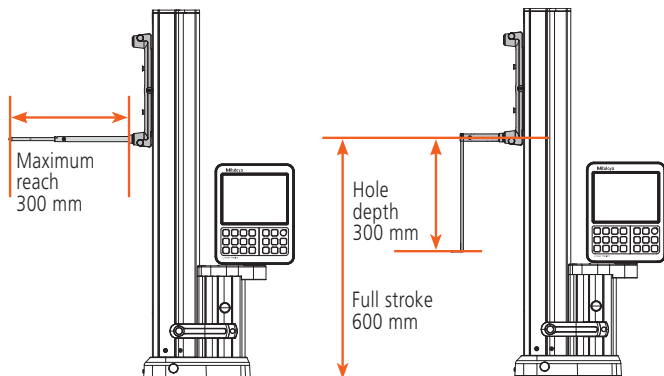

## ABSOLUTE 1D Height Gage QM-Height Series

- High-resolution ABSOLUTE linear encoder for position detection.
- High-accuracy:  $\pm(2.4 + 2.1L / 600)\mu\text{m}$ .
- Pneumatic flotation system / positioning grip allows for smooth movement along surface plate (select models).
- Large, stationary display panel with user-friendly icon control keys and GO/NO-GO LED indicator.
- Digital and USB output: Supports Mitutoyo wireless SPC output.
- Fully compatible with existing Mitutoyo Digimatic peripherals (SPC cables, U-WAVE wireless transmitters, multiplexers, etc.).
- Battery life of 1200 hours in continuous use with four AA batteries, an improvement from 300 hours.

## GO/ $\pm$ NG judgment by LED (red, orange, green) and measurement examples

- LEDs are activated at the time of tolerance judgment: green for GO, red for +NG, and orange for -NG. -NG, GO and +NG also appear on the LCD.



64PKA129C



"d2" is the name for Mitutoyo Digimatic output compatible with up to 8 digits of I/O data.

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo

## d2 Digimatic and USB outputs

- Digimatic and USB ports are provided as standard. Using the U-WAVE-T measurement data wireless communication system enables instant transmission of measurement data to a PC via wireless communication which reduces manual input errors and improves data reliability and operational efficiency.



To install U-WAVE-T, separately purchase the optional mounting plate (02AZE990).








64PKA130C

- Measure diameters, gap distances, center-to-center distances, and more.
- Sub-display can show difference between current and previous measurement or distance from current measurement to origin.
- The origin can be set at the top of a surface plate, centerline, or any top or bottom surface within its range.





### Measurement Examples



| Part No.  | Range               | Resolution                                         | Remarks                    | List       | Promo      |
|-----------|---------------------|----------------------------------------------------|----------------------------|------------|------------|
| 64PKA094C | 0 - 14" / 0 - 350mm | 0.001mm / 0.0005mm / 0.0005" / .0001" (selectable) | Pneumatic Flotation System | \$5,501.00 | \$5,225.95 |
| 64PKA095C | 0 - 24" / 0 - 600mm |                                                    |                            | \$6,154.38 | \$5,846.66 |
| 64PKA129C | 0 - 14" / 0 - 350mm |                                                    |                            | \$6,401.00 | \$6,080.95 |
| 64PKA130C | 0 - 24" / 0 - 600mm |                                                    |                            | \$6,855.00 | \$6,512.25 |

### Optional Accessories

| Order No.   | Description                                | List       | Promo      |
|-------------|--------------------------------------------|------------|------------|
| 12AAC072    | DEPTH PROBE                                | \$283.00   | \$268.85   |
| 12AAA837    | INDICATOR HOLDER (ACCEPTS 3/8" STEM)       | \$206.00   | \$195.70   |
| 12AAA793    | PROBE EXTENSION HOLDER (3.3" / 85mm)       | \$229.00   | \$217.55   |
| 226118      | SHANK WITH M3 THREAD SCREW                 | \$145.00   | \$137.75   |
| 957265      | 20MM DIA. DISK STYLUS FOR LINEAR HEIGHT    | \$543.00   | \$515.85   |
| 957264      | 14MM DIA. DISK STYLUS FOR LINEAR HEIGHT    | \$443.00   | \$420.85   |
| 12AAF669    | 10PI BALL CONTACT POINT(COAXIAL)           | \$335.00   | \$318.25   |
| 957261      | 2MM DIA. BALL STYLUS FOR LINEAR HEIGHT     | \$301.00   | \$285.95   |
| 517-814-10  | GRAPLATE 36X48" GRADE A                    | \$3,245.00 | \$3,082.75 |
| 517-964-10  | GRAPLATE STAND 36X48"                      | \$2,000.00 | \$1,900.00 |
| 517-808-10  | GRAPLATE 24X36" GRADE A                    | \$1,492.00 | \$1,417.40 |
| 517-956-10  | GRAPLATE STAND 24X36"                      | \$1,890.00 | \$1,795.50 |
| 06AFM380D   | USB-ITN-D INPUT TOOL DIRECT CABLE          | \$278.00   | \$264.10   |
| 02AZD730G-D | U-WAVE TRANSMITTER W/ CONNECTING CABLE (D) | \$464.00   | \$440.80   |
| 02AZD810D   | U-WAVE-RECEIVER                            | \$717.00   | \$681.15   |



All prices are in Canadian Dollars

## Coolant-Proof Calipers

- Sealed housing is IP67 rated, meaning it's resistant to the coolants, dirt, grit and chips found in many manufacturing environments.
- Easy to use - no need to wipe or clean the scale.
- .0005"/0.01mm resolution with  $\pm 0.001$ " accuracy.
- Automatic power-on/off.
- Certificate of Inspection provided.



IP67

SPC

ABSOLUTE  
Absolute System Protected by MITUTOYO

COMPATIBLE WITH  
**U-WAVE<sup>fit</sup>**

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo

| Order No.               | Range         | List     | Promo           |
|-------------------------|---------------|----------|-----------------|
| <b>Non-Output Style</b> |               |          |                 |
| 500-752-20              | 0-6"/0-150mm  | \$295.00 | <b>\$251.00</b> |
| 500-753-20              | 0-8"/0-200mm  | \$397.00 | <b>\$377.00</b> |
| 500-754-20              | 0-12"/0-300mm | \$601.00 | <b>\$571.00</b> |
| <b>SPC Output Style</b> |               |          |                 |
| <b>fit</b> 500-762-20   | 0-6"/0-150mm  | \$351.00 | <b>\$333.00</b> |
| <b>fit</b> 500-763-20   | 0-8"/0-200mm  | \$452.00 | <b>\$429.00</b> |
| <b>fit</b> 500-764-20   | 0-12"/0-300mm | \$760.00 | <b>\$646.00</b> |

\*  $\pm 0.0015$ " accuracy **fit** U-WAVE Fit compatible

SPC cable - 1m: 05CZA624 2m: 05CZA625



## COOLANT PROOF™ IP67

COOLANT PROOF is the universal term of Mitutoyo Digimatic Small Tool Instruments that are free from measurement error and physical deterioration due to routine exposure to water, cutting oil or coolant. This high performance is achieved by using encoders that are inherently immune to contamination, where exposure is inevitable, combined with comprehensive sealing techniques and extremely oil-resistant materials to guarantee a long working life under normal operating conditions.

## Digimatic Carbon Fiber Caliper

**10% OFF**



552-314-10


| Order No.  | Range      | Accuracy      | Resolution    | List       | Promo             |
|------------|------------|---------------|---------------|------------|-------------------|
| 552-312-10 | 0(.5")-18" | $\pm 0.002$ " | .0005"/0.01mm | \$1,341.00 | <b>\$1,206.90</b> |
| 552-313-10 | 0(.5")-24" | $\pm 0.002$ " | .0005"/0.01mm | \$1,503.00 | <b>\$1,352.70</b> |
| 552-314-10 | 0(1")-40"  | $\pm 0.002$ " | .0005"/0.01mm | \$2,683.00 | <b>\$2,414.70</b> |
| 552-315-10 | 0(1")-60"  | $\pm 0.004$ " | .0005"/0.01mm | \$3,206.00 | <b>\$2,885.40</b> |
| 552-316-10 | 0(1")-80"  | $\pm 0.005$ " | .0005"/0.01mm | \$5,018.00 | <b>\$4,516.20</b> |

SPC cable - 1m: 05CZA624 2m: 05CZA625

- Lightweight Digimatic Calipers that employ CFRP (Carbon Fiber Reinforced Plastics) in the beam and jaws.
- Highly durable and easy to handle.
- Direct readout of ID measurements from the LCD. (Offset value can be set easily by pressing the Offset key.)
- Preset function for setting a desired starting point.
- With SPC data output.
- Special models available with ceramic jaws which are suitable for measuring abrasive and magnetic products.
- Can be used in workshop conditions exposed to coolant, water, dust or oil.
- Incorporates ABSOLUTE measurement system.
- Automatic power-on/off.



## CERA Caliper Checker

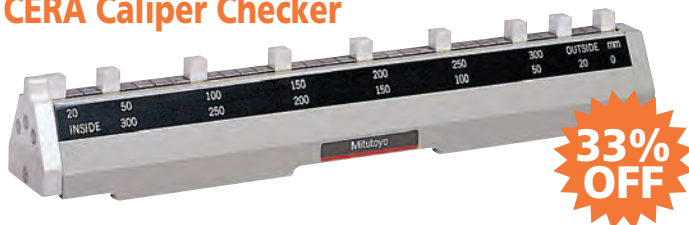

**33% OFF**

| Order No. | Range   | Remarks (length to check)                                                                                   | List       | Promo             |
|-----------|---------|-------------------------------------------------------------------------------------------------------------|------------|-------------------|
| 515-565   | 0 - 12" | Outside measurement:<br>1", 2", 4", 6", 8", 10", 12"<br>Inside measurement:<br>1", 2", 4", 6", 8", 10", 12" | \$6,443.00 | <b>\$4,316.81</b> |

### CERA Caliper Checker

- Permanently wrung, high grade CERA gage blocks in a protective metal casing.
- Stands perpendicular for height gage inspection.

\* Also includes same features as CERA Gage Blocks

### CERA (Zirconia Ceramic) Gage Blocks\*

- Extremely high wear resistance, 3x better than carbide.
- Corrosion proof - no oil needed.
- Closest expansion coefficient to steel.
- Anti-magnetic - keeps away steel dust.
- High wringing force due to high density.
- Crack and burr resistant.
- Low thermal conductivity - excellent dimensional stability under brief temperature changes (from handling, etc.).

Prices effective October 1 through December 23, 2025

## Digimatic Calipers

- AOS Electromagnetic inductive sensor improves environmental resistance against dirt, water and oil.
- A battery life of approximately 3.5 years has been achieved under normal use through the adoption of the Mitutoyo ABSOLUTE scale.
- The slider configuration features an ergonomic, thumb-friendly shape.
- Step-measurement capable.
- The data output function allows integration into Statistical Process Control and measurement systems.
- Display character height: 9mm.
- AOS applies to 4", 6" and 8" models.
- Resolution: .0005"/0.01mm.

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo



500-171-30

**SPC**

**ABSOLUTE**  
Absolute System Powered by MITUTOYO


**ABSOLUTE AOS**  
**DIGIMATIC**  
AOS: Advanced Onsite Sensor

| Order No.                    | Range          | Remarks               | List       | Promo             |
|------------------------------|----------------|-----------------------|------------|-------------------|
| <b>No SPC Output Style</b>   |                |                       |            |                   |
| 500-195-30                   | 0-4"/0-100mm   | .075" Round Depth Bar | \$205.00   | <b>\$199.00</b>   |
| 500-196-30                   | 0-6"/0-150mm   |                       | \$221.00   | <b>\$210.00</b>   |
| 500-197-30                   | 0-8"/0-200mm   |                       | \$319.00   | <b>\$303.00</b>   |
| 500-193-30                   | 0-12"/0-300mm  |                       | \$636.00   | <b>\$541.00</b>   |
| <b>With SPC Output Style</b> |                |                       |            |                   |
| <b>fit</b> 500-170-30        | 0-4"/0-100mm   | .075" Round Depth Bar | \$243.00   | <b>\$236.00</b>   |
| <b>fit</b> 500-171-30        | 0-6"/0-150mm   |                       | \$259.00   | <b>\$246.00</b>   |
| 500-172-30                   | 0-8"/0-200mm   |                       | \$342.00   | <b>\$332.00</b>   |
| 500-173-30                   | 0-12"/0-300mm  |                       | \$700.00   | <b>\$595.00</b>   |
| 500-505-10                   | 0-18"/0-450mm  | Without Thumb Roller  | \$1,161.00 | <b>\$1,103.00</b> |
| 500-506-10                   | 0-24"/0-600mm  | Without Thumb Roller  | \$1,276.00 | <b>\$1,212.00</b> |
| 500-507-10                   | 0-40"/0-1000mm | Without Thumb Roller  | \$2,455.00 | <b>\$2,332.00</b> |

**fit** U-WAVE-Fit compatible

SPC cable with data switch – 1m: 959149 2m: 959150

## Dial Caliper

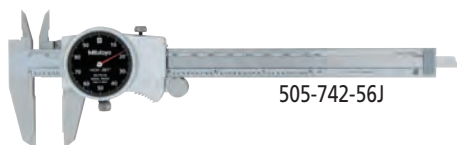


505-742-56J

- Smooth sliding with high shock protection.
- Lock screw for dial bezel and for holding the sliding jaw position.
- Can measure OD, ID, depth and steps.
- Models available with carbide-tipped OD and ID jaws.

| Order No.   | Range           | Remarks             | List     | Promo           |
|-------------|-----------------|---------------------|----------|-----------------|
| 505-742J    | 0-6" .100"/rev  |                     | \$189.00 | <b>\$180.00</b> |
| 505-738     | 0-6" .100"/rev  | Carbide-tipped jaws | \$294.00 | <b>\$279.00</b> |
| 505-740J    | 0-6" .200"/rev  |                     | \$171.00 | <b>\$162.00</b> |
| 505-743J    | 0-8" .100"/rev  |                     | \$250.48 | <b>\$213.00</b> |
| 505-746     | 0-12" .100"/rev |                     | \$390.23 | <b>\$371.00</b> |
| 505-749     | 0-12" .200"/rev |                     | \$370.00 | <b>\$315.00</b> |
| 505-742-56J | 0-6" .100"/rev  | Black Dial Face     | \$189.00 | <b>\$180.00</b> |

## Offset Caliper

- Main scale jaw can slide up and down to facilitate measurement of stepped sections. (Hard-to-reach dimensions such as A, B, C can be accurately measured).
- With depth bar.
- With SPC data output.



573-701-20



**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

**IP67**

**SPC**

**ABSOLUTE**  
Absolute System Powered by MITUTOYO

| Order No.             | Range           | Accuracy | Resolution      | List       | Promo           |
|-----------------------|-----------------|----------|-----------------|------------|-----------------|
| <b>fit</b> 573-701-20 | 0-6" / 0-150mm  | ±.001"   | .0005" / 0.01mm | \$657.00   | <b>\$624.00</b> |
| <b>fit</b> 573-702-20 | 0-8" / 0-200mm  | ±.001"   | .0005" / 0.01mm | \$754.00   | <b>\$716.00</b> |
| <b>fit</b> 573-704-20 | 0-12" / 0-300mm | ±.0015"  | .0005" / 0.01mm | \$1,012.00 | <b>\$961.00</b> |


**fit** U-WAVE-Fit compatible

SPC cable with data switch – 1m: 05CZA624 2m: 05CZA625

## Point Caliper

- Narrow tip jaws fit into very small grooves and tracks, making many previously difficult outside measurements easier to achieve.
- With depth bar.
- With SPC data output.

Random point-to-point dimensions

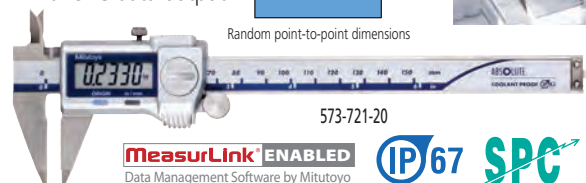

573-721-20

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

**IP67**

**SPC**

**ABSOLUTE**  
Absolute System Powered by MITUTOYO

| Order No.              | Range          | Accuracy | Resolution      | List     | Promo           |
|------------------------|----------------|----------|-----------------|----------|-----------------|
| <b>fit</b> 573-721-20  | 0-6" / 0-150mm | ±.001"   | .0005" / 0.01mm | \$576.00 | <b>\$490.00</b> |
| <b>fit</b> 573-725-20* | 0-6" / 0-150mm | ±.001"   | .0005" / 0.01mm | \$716.00 | <b>\$680.00</b> |

\* Extended tips **fit** U-WAVE-Fit compatible

SPC cable with data switch – 1m: 05CZA624 2m: 05CZA625

## Low-force Caliper

- Due to the low measuring force, these calipers are ideal for elastic or resilient workpieces such as plastic parts and rubber parts that standard calipers can't measure consistently.
- With SPC data output.



573-291-30



**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

**SPC**

| Order No.             | Range          | Accuracy | Resolution      | List       | Promo             |
|-----------------------|----------------|----------|-----------------|------------|-------------------|
| <b>fit</b> 573-291-30 | 0-7" / 0-180mm | ±.002"   | .0005" / 0.01mm | \$1,168.00 | <b>\$1,133.00</b> |

**fit** U-WAVE-Fit compatible



All prices are in Canadian Dollars

## Quickmikes

The new Quickmike series still boasts the super-fast spindle feed rate that's **20x faster** than standard micrometers.

- > IP65 protection – can be used around cutting fluids.
- > MIN Hold – the minimum measurement can be held on the display for more repeatable and accurate measurements.
- > Larger LCD – 33% larger, 10mm character height.
- > Function lock – prevents accidental changes.
- > 5 year battery life – more operating time, less downtime looking for and replacing batteries.
- > Non-rotating spindle.



**MeasurLink** ENABLED  
Data Management Software by Mitutoyo



293-676-20

**ABSOLUTE**™ **SPC**

**COOLANT PROOF**™ IP65

| Order No.  | Range    | Resolution      | Accuracy | Flatness  | Parallelism | List     | Promo           |
|------------|----------|-----------------|----------|-----------|-------------|----------|-----------------|
| 293-676-20 | 0 - 1.2" | .00005"/0.001mm | ±0.0001" | 0.000012" | 0.00008"    | \$836.00 | <b>\$794.00</b> |
| 293-677-20 | 1 - 2.2" | .00005"/0.001mm | ±0.0001" | 0.000012" | 0.00008"    | \$913.00 | <b>\$867.00</b> |

SPC cable with data switch – 1m: 05CZA662 2m: 05CZA663



## MDC-Lite Micrometer

- > Provided only with zero set and in/mm (inch/metric models only) keys.
- > A ratchet stop or friction thimble for a constant measuring force.
- > Measurement readout with large characters on the LCD.
- > No spindle clamp. No data output.

| Order No.  | Range               | Resolution        | Remarks          | List     | Promo |
|------------|---------------------|-------------------|------------------|----------|-------|
| 293-831-30 | 0 - 1" / 0 - 25.4mm | .00005" / 0.001mm | Ratchet Stop     | \$198.00 | -     |
| 293-832-30 | 0 - 1" / 0 - 25.4mm | .00005" / 0.001mm | Friction Thimble | \$209.00 | -     |



293-831-30

## Digimatic Micrometer

- > New electromagnetic ABSOLUTE sensor - Improved resistance to environmental conditions such as dirt, oil and water, which can cause false readings.
- > New ratchet thimble on select models improves one-hand operability.
- > New anti-slip finish for improved grip while taking measurements.
- > Long battery life – 2.4 years under normal operation.
- > Fully compatible with existing Mitutoyo Digimatic peripherals (SPC Cables, U-WAVE wireless transmitters, DP1-VA, etc.) – SPC output-enabled IP65 models.
- > Function-lock system prevents inadvertent setting changes.
- > Certificate of Inspection provided.

**SPC**  
**COOLANT PROOF**™



293-330-30

**IP65**

| Order No.              | Range            | Resolution      | Remarks                         | List     | Promo           |
|------------------------|------------------|-----------------|---------------------------------|----------|-----------------|
| <b>fit</b> 293-330-30* | 0-1"/0-25.4mm    | .00005"/0.001mm | Ratchet Stop                    | \$341.00 | <b>\$324.00</b> |
| 293-340-30             | 0-1"/0-25.4mm    | .00005"/0.001mm | Ratchet Stop                    | \$268.00 | <b>\$260.00</b> |
| 293-344-30             | 0-1"/0-25.4mm    | .00005"/0.001mm | Ratchet Thimble                 | \$268.00 | <b>\$260.00</b> |
| 293-348-30             | 0-1"/0-25.4mm    | .00005"/0.001mm | Friction Thimble                | \$270.00 | <b>\$261.90</b> |
| 293-349-30             | 0-1"/0-25.4mm    | .0001"/0.001mm  | Ratchet Thimble, Tenths Reading | \$270.00 | <b>\$262.00</b> |
| <b>fit</b> 293-331-30* | 1-2"/25.4-50.8mm | .00005"/0.001mm | Ratchet Stop w/Standard         | \$399.00 | <b>\$379.00</b> |
| 293-341-30             | 1-2"/25.4-50.8mm | .00005"/0.001mm | Ratchet Stop w/Standard         | \$343.00 | <b>\$326.00</b> |
| 293-345-30             | 1-2"/25.4-50.8mm | .00005"/0.001mm | Ratchet Thimble w/Standard      | \$343.00 | <b>\$326.00</b> |
| <b>fit</b> 293-334-30* | 0-1"/0-25.4mm    | .00005"/0.001mm | Ratchet Thimble                 | \$365.00 | <b>\$347.00</b> |
| <b>fit</b> 293-335-30* | 0-1"/0-25.4mm    | .00005"/0.001mm | Friction Thimble                | \$340.00 | <b>\$330.00</b> |

\*with SPC Output

**fit** U-WAVE Fit compatible

SPC cable with data switch – 1m: 05CZA662 2m: 05CZA663

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo



Prices effective October 1 through December 23, 2025

## Purchase the world's first 5µinch /0.1µm resolution micrometer and receive a USB input tool and cable (over \$394 in value)

Using precision digital measuring tools together with a USB input tool improves both measurement results and data reliability. The high-accuracy MDH with 5 millionths resolution can output in its entirety in both inch and metric. Resulting data can input directly to Excel®, MeasurLink® or other SPC programs.

› Range: 0-1", Resolution: .000005", Accuracy: +/- .000020

| Part No.   | Description                                               | List       |
|------------|-----------------------------------------------------------|------------|
| 293-130-10 | MDH Micrometer with high accuracy, high resolution output | \$2,308.00 |
| 05CZA662   | SPC CONNECTING CABLE (1M)                                 | Included   |
| 264-020    | USB INPUT TOOL                                            | Included   |



## ABSOLUTE Digimatic Height Gages

Popular Mitutoyo single-beam height gages have been redesigned to be even easier to use with larger displays, various hardware accessories, and multiple data options such as wired and wireless output, data loggers and more.

### Features:

- › Durable Build - Iron detector and base, steel beam and holder.
- › Easy to use slider feed wheel.
- › Multiple data equipment options.
- › Other improvements: twist-off battery cap, 20% larger LCD, handy Data button.



Shown with optional Test Indicator and mounting hardware (see page 9).



Shown with optional U-Wave Bluetooth® transmitter (see page 28 and connector 02AZD790F)



MeasurLink® ENABLED  
Data Management Software by Mitutoyo

SPC

| Order No. | Range            | Resolution       | Functions                                                | Drive Method               | Data Output  | Max. response speed | Battery Life                     | List       | Promo      |
|-----------|------------------|------------------|----------------------------------------------------------|----------------------------|--------------|---------------------|----------------------------------|------------|------------|
| 570-412   | 0"-12"/0mm-300mm | 0.0005" / 0/01mm | On/Off, Origin, Zero/ABS, Hold/Data, inch/mm conversion" | Slider-feed Wheel (manual) | Digimatic d1 | Unlimited           | Approx. 5 Years Under Normal Use | \$1,033.00 | \$1,002.00 |
| 570-413   | 0"-18"/0mm-450mm |                  |                                                          |                            |              |                     |                                  | \$1,383.00 | \$1,313.85 |
| 570-414   | 0"-24"/0mm-600mm |                  |                                                          |                            |              |                     |                                  | \$1,610.00 | \$1,530.00 |

All prices are in Canadian Dollars

U-WAVE is a wireless system that turns any Mitutoyo gage with Digimatic output into a wireless keyboard for fast, error-free data collection. U-WAVE transmitters now come in three models: Bluetooth®, Fit and Standard. Send data with a push of a button or request it from the PC or mobile device.



## U-WAVE Bluetooth®


### U-WAVE-TMB/TCB

The new U-WAVE Bluetooth® transmitter features:

- Now utilizes the popular Bluetooth® 4.2 Low Energy Wireless Technology.
- This new Bluetooth® version of U-WAVE allows a simple connection to smartphones, tablets and Bluetooth® enabled Laptops and PC's.
- The same low-profile and ergonomic fit benefits of the U-WAVE-Fit.
- A buzzer type and IP67 type with dustproof and waterproof specifications are available.
- Up to 7 units can be connected to 1 Bluetooth® enabled PC without a receiver.
- New U-WAVEpak for Android, iOS and Windows available at no cost.



Request an assessment to determine how quickly your company can obtain a full ROI

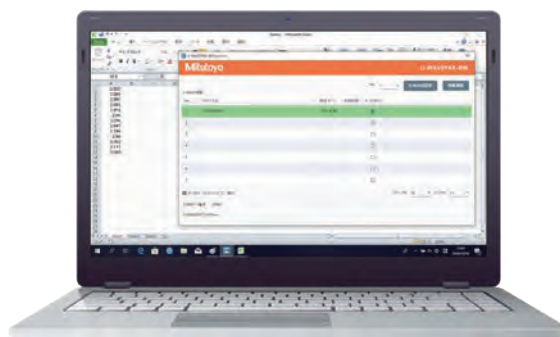

The measurement data is used to make the software in the pc Transferable PC Communication Software U-WAVEPAK-BW.

The Google Play and Google Play logos are trademarks of Google LLC. The Apple and Apple logos are trademarks of Apple Inc.



U-WAVE-TMB



Data Management Software by Mitutoyo



U-WAVE-TCB



### U-WAVE-TMB/TCB\*

| Order No.    | Model      | Measuring Instrument*                                                   | Remarks                                   | List     | Promo    |
|--------------|------------|-------------------------------------------------------------------------|-------------------------------------------|----------|----------|
| 264-624-IP-S | U-WAVE-TCB | 4", 6", 8", 12" standard caliper                                        | Transmitter and Connection Unit           | \$409.00 | \$368.10 |
| 264-624-IP   | U-WAVE-TCB | 4", 6", 8", 12" IP67 caliper                                            | Transmitter and Connection Unit           | \$409.00 | \$368.10 |
| 264-626-IP-M | U-WAVE-TMB | Coolant-proof (IP65) micrometer Micrometers (excl. S1, excl. QuickMike) | Transmitter and Connection Unit           | \$409.00 | \$368.10 |
| 02AZF700-TMB | U-WAVE-TMB | 0.5" (12.5mm) Stroke for S1 Indicators                                  | Transmitter and Connection Unit           | \$434.00 | \$390.60 |
| 02AZG011-TMB | U-WAVE-TMB | 1" (25.4mm) Stroke or Larger for S1 Indicators                          | Transmitter, Bracket, and Connection Unit | \$509.00 | \$458.10 |

\* No U-WAVE Receiver required

Prices effective October 1 through December 23, 2025

# U-WAVE Wireless Data Transmitters

Mitutoyo

All prices are in Canadian Dollars

The new Mitutoyo U-WAVE-Fit wireless data transmitter fits to the back of popular Mitutoyo hand-held measuring instruments. This new design allows for a snug fit behind the display resulting in a more ergonomic feel. U-WAVE-Fit is the same technology as the U-WAVE-T, just a smaller version.

UP TO  
**10%  
OFF**

**U-WAVE<sup>fit</sup>**



For micrometers

U-WAVE-TM



For calipers

U-WAVE-TC

U-WAVE-TM for micrometers and U-WAVE-TC for calipers are available both as the buzzer and water/dust-proof IP67 types. The buzzer type notifies the normal reception of data by LED and buzzer sound. The water/dust-proof IP67 type is designed for harsh environments and therefore is only equipped with LED notification of data reception.

**MeasurLink<sup>®</sup> ENABLED**  
Data Management Software by Mitutoyo

## U-WAVE-Fit (Transmitter)

| Order No.    | Model     | Measuring Instrument*                                                   | Remarks                                   | List     | Promo           |
|--------------|-----------|-------------------------------------------------------------------------|-------------------------------------------|----------|-----------------|
| 264-620-IP-S | U-WAVE-TC | 4", 6", 8", 12" IP67 standard caliper                                   | Transmitter and Connection Unit           | \$409.00 | <b>\$368.10</b> |
| 264-620-IP   | U-WAVE-TC | 4", 6", 8", 12" IP67 caliper                                            | Transmitter and Connection Unit           | \$409.00 | <b>\$368.10</b> |
| 264-622-IP-M | U-WAVE-TM | Coolant-proof (IP65) micrometer Micrometers (excl. S1, excl. QuickMike) | Transmitter and Connection Unit           | \$409.00 | <b>\$368.10</b> |
| 02AZF700-TM  | U-WAVE-TM | 0.5" (12.5mm) Stroke for S1 Indicators                                  | Transmitter and Connection Unit           | \$434.00 | <b>\$390.60</b> |
| 02AZG011-TM  | U-WAVE-TM | 1" (25.4mm) Stroke or Larger for S1 Indicators                          | Transmitter, Bracket, and Connection Unit | \$509.00 | <b>\$458.10</b> |

\* Please contact Mitutoyo or distributor for further details

- The transmitter is designed to fit in the space behind the display, and the connecting cable has been replaced by a rigid connector.
- Approx. 20 m transmission range (within visible range).
- 2.4GHz wireless system for reliable and secure data transmission.
- Easy data export to Microsoft<sup>®</sup> Excel<sup>®</sup> or SPC software applications.
- Transmitter confirms data transfer by an LED signal and optional buzzer.
- An IP67 transmitter is available to ensure a coolant-proof gaging system.
- Low power consumption: 400,000 data transmissions with a single battery.

## U-WAVE-R (Receiver)

| Order No. | Remarks             | Software   | Number of U-WAVE-R units that can be connected to PC | Number of U-WAVE-T units that can be connected | List     | Promo           |
|-----------|---------------------|------------|------------------------------------------------------|------------------------------------------------|----------|-----------------|
| 02AZD810D | U-WAVE-R + Software | U-WAVE PAK | Up to 15                                             | Up to 100                                      | \$717.00 | <b>\$645.30</b> |

## MeasurLink<sup>®</sup> Quality Data Management Software

Monitor, analyze, collect, calibrate, report and improve.

15%  
OFF



Achieve Total Quality Management with the Total Quality MeasurLink<sup>®</sup> license. This is a single floating license that can be accessed by anyone and anywhere on the network with every single module. For the engineer(s) who wants total freedom to continuously improve their quality department. **No annual fees.**

| Order No. | Remarks                                             | List       | Promo             |
|-----------|-----------------------------------------------------|------------|-------------------|
| 64AAB855F | MeasurLink <sup>®</sup> V10 Single Floating License | \$3,887.50 | <b>\$3,290.00</b> |

TQM License Includes:

- > Real-Time SPC
- > AQL Sampling
- > Advanced Data Analysis
- > Automated Reporting and Analysis
- > Data Collection Alerts
- > Gage Inventory Management
- > Gage Calibration
- > Gage R&R
- > Automated Ballooning
- > AS9102 First Article Reports
- > And more!



All prices are in Canadian Dollars

## Solution for Battery Foil Thickness Measurement

The key to success:

High accuracy thickness measurement of thin foil and film samples

- The combination of the Litematic and the vacuum plate system provides high accuracy measurement of easily deformed material.
- Litematics allow measurements at forces as low as 0.01N. The ceramic ball contact included with the Vacuum Packages will increase the force to 0.04N.
- The vacuum plate absorbs the contact-sensitive specimen, such as battery film, onto the plate surface for more stable measurement.
- Mitutoyo America provides vacuum plate packages as well as custom-made solutions.
- Optional set 02AZE375 enables the application of up to 10 intermediate forces.
- Data export to MeasurLink® and MS Excel®.

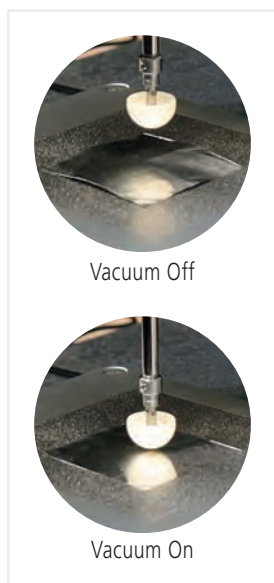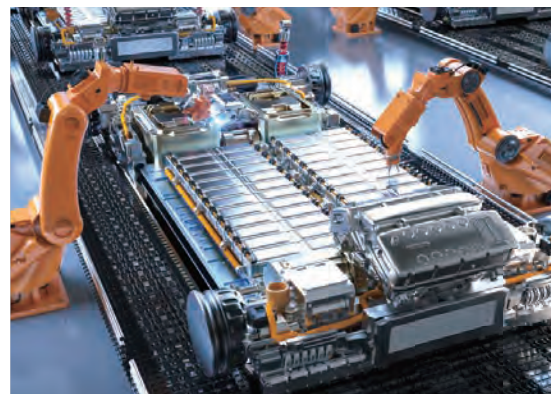

318-221A + 64PKA297



318-221A + K543722



318-226A + 64PKA298 + 957460



### Stand-alone Litematic Main Unit

| Code     | Model   | Test Force* | List        | Promo              |
|----------|---------|-------------|-------------|--------------------|
| 318-221A | VL-50-B | 0.01N       | \$12,088.00 | <b>\$11,484.00</b> |

➤ Measuring accuracy (20°C) up to  $(0.5+L/100)$   $\mu\text{m}$  L=arbitrary measuring length (mm).

➤ Repeatability up to 0.05  $\mu\text{m}$ .

\*The ceramic ball contact included with Vacuum Packages will add 0.03N.



### Vacuum Package Add-ons

| Code     | Model                          | List        | Promo              |
|----------|--------------------------------|-------------|--------------------|
| 64PKA297 | 50x50mm Vacuum Package         | \$5,086.41  | -                  |
| K543722  | Laser-activated Vacuum Package | \$17,620.97 | <b>\$14,978.00</b> |

### Separate Type Litematic Main Unit

| Code     | Model         | Test Force* | List        | Promo              |
|----------|---------------|-------------|-------------|--------------------|
| 318-226A | VL-50S-B      | 0.01N       | \$12,088.00 | <b>\$11,484.00</b> |
| 957460   | Granite Stand |             | \$6,230.00  | <b>\$5,919.00</b>  |

➤ Measuring accuracy (20°C) up to  $(0.5+L/100)$   $\mu\text{m}$  L=arbitrary measuring length (mm).

➤ Repeatability up to 0.05  $\mu\text{m}$ .

\*The ceramic ball contact included with Vacuum Packages will add 0.03N.



### Vacuum Package Add-ons

| Code     | Model                    | List       | Promo |
|----------|--------------------------|------------|-------|
| 64PKA298 | 100x100mm Vacuum Package | \$5,598.91 | -     |

## EJ Series Industrial Interface-mounted Compact Counter

### Compact size and easy to use

Up to 8 compact counters (EJ counters) can be linked providing the capacity to connect up to 16 gages. On a DIN rail, each unit can be connected directly without using cables, so it takes up minimal space. All linked units and gages can be driven by a single power source.

### EtherNet/IP, CC-Link, PROFINET, EtherCAT or USB Connection

Data can be output through an industrial interface by linking a compact counter (EJ counter) with an interface unit. Constant data monitoring and positional management are performed. A USB interface is also provided for easy connection with a computer.

Note: The range of interfaces is set to be expanded in the near future.

### Calculation function

Enables sum difference operations between 2 gages connected to the same counter. Functions such as tolerance judgment and peak hold are also included.



| Order No | Description                          | List       | Promo             |
|----------|--------------------------------------|------------|-------------------|
| 542-081  | Main EJ Module Counter               | \$755.00   | <b>\$732.00</b>   |
| 542-081A | Main EJ Module w/AC Components       | \$790.00   | <b>\$766.00</b>   |
| 21HZA149 | USB Only Interface                   | \$514.00   | <b>\$499.00</b>   |
| 21HZA186 | CC-Link Module (Mitsubishi), and USB | \$1,112.00 | <b>\$1,079.00</b> |
| 21HZA187 | PROFINET Module                      | \$1,280.00 | <b>\$1,242.00</b> |
| 21HZA188 | EtherNet/IP Module                   | \$1,266.00 | <b>\$1,228.00</b> |
| 21HZA264 | EtherCat Module                      | \$1,313.00 | <b>\$1,274.00</b> |

## Linear Gage LG100 Series



| Order No | Description                                     | List       | Promo             |
|----------|-------------------------------------------------|------------|-------------------|
| 542-190  | LG100-110, Range: .4"/10mm, Res: .00005"/1μm    | \$863.00   | <b>\$837.00</b>   |
| 542-193  | LG100-125, Range: 1"/25mm, Res: .00005"/1μm     | \$1,070.00 | <b>\$1,038.00</b> |
| 542-196  | LG100-150, Range: 2"/50mm, Res: .00005"/1μm     | \$1,276.00 | <b>\$1,238.00</b> |
| 542-191  | LG100-0510, Range: .4"/10mm, Res: .00002"/0.5μm | \$889.00   | <b>\$862.00</b>   |
| 542-194  | LG100-0525, Range: 1"/25mm, Res: .00002"/0.5μm  | \$1,142.00 | <b>\$1,108.00</b> |
| 542-197  | LG100-0550, Range: 2"/50mm, Res: .00002"/0.5μm  | \$1,314.00 | <b>\$1,275.00</b> |
| 542-192  | LG100-0110, Range: .4"/10mm, Res: 5μinch/0.1μm  | \$1,329.00 | <b>\$1,130.00</b> |
| 542-195  | LG100-0125, Range: 1"/25mm, Res: 5μinch/0.1μm   | \$1,100.00 | <b>\$1,067.00</b> |

### High accuracy

Precision and accuracy demanded by the automated assembly and inspection markets are guaranteed. Due to our expertise as a manufacturer of measuring instruments, repeatability in the full measurement range (2σ) and narrow-range precision are also guaranteed.

### Environment resistance

Sliding durability of more than 50 million cycles\*, with protection level of IP67G. A highly oil-resistant material is used in the rubber cap and cable sheath so it can be used in harsh environments.

\* 10 mm range models (Actual value from in-house tests)


### Reference point detection (LG100 Series)

Reference point signal output functions are featured throughout this series. When incorporating into a device, the master setting value is easy to set and is retained after shutdown.

## LG QuickSetup Tool

A configuration tool is FREE for use with the EJ counter when connected via the optional USB interface. Multiple settings normally carried out with counter operating keys can now be easily applied from a computer. Live displays allow for easily viewing gage positions or measurements at a glance.

Note: This software can be used free of charge and downloaded from the Mitutoyo website.  
<https://www.mitutoyo.co.jp/eng/contact/products/lg/>

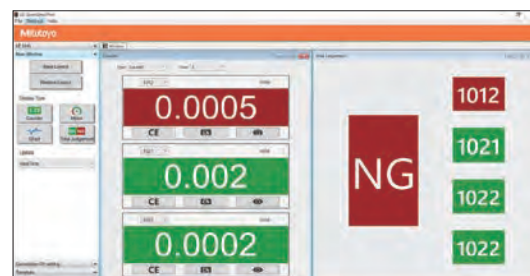

## Linear Gage LG200 Series



| Order No | Description                                      | List       | Promo             |
|----------|--------------------------------------------------|------------|-------------------|
| 542-188  | LG200-0110, Range: 0.4"/10mm, Res: .00005"/0.1μm | \$1,177.00 | <b>\$1,142.00</b> |
| 542-187  | LG200-0510, Range: 0.4"/10mm, Res: .00002"/0.5μm | \$1,018.00 | <b>\$987.00</b>   |
| 542-186  | LG200-110, Range: 0.4"/10mm, Res: .00005"/1μm    | \$1,018.00 | <b>\$987.00</b>   |

All prices are in Canadian Dollars

## Digimatic Quill Kit


Easy Installation, Fits Most Vertical Knee Mills

- Easy-to-read LCD with resolution of .0005"/0.01mm. 0-6" travel.
- Push-button controls for inch/mm, Zero-Set and On/Off.
- Powered by a single SR-44 Battery which lasts about 1 year with normal use.
- SPC Output for data transmission to data processors or a remote display.
- ABS encoder.

| Order No. | Description                                                                     | List     | Promo    |
|-----------|---------------------------------------------------------------------------------|----------|----------|
| 053906B   | Digimatic Quill Kit Complete with Brackets & Scale for Bridgeport Type Machines | \$434.00 | \$421.00 |

SPC  
ABSOLUTE™

MeasurLink™ ENABLED  
Data Management Software by Mitutoyo

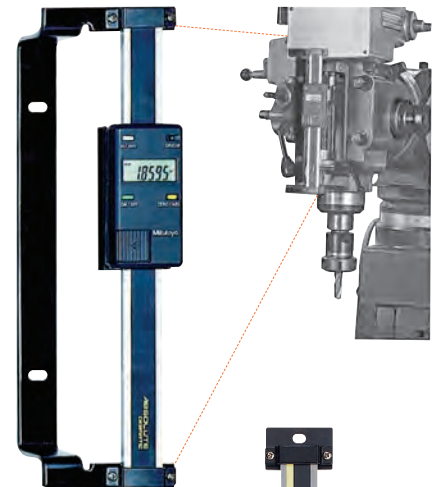

## ABSOLUTE Digimatic Scale Units

- The Origin key allows setting of an ABSOLUTE zero point to be used as reference in subsequent measurements. Once set, the ABS Digimatic Scale Unit is ready to show its true position whenever turned on, rather than 0.00" as with standard models.
- The Zero/ABS key allows the display to be zero-set at any slider position along the beam for incremental comparison measurements. This key will also allow return to the ABSOLUTE coordinate with a display of the true position from the origin point.
- No rack, no pinion, no glass scale. Digimatic scale unit is safely embedded in the hardened stainless steel blade.
- Horizontal or vertical face according to the scale mounting direction.
- Multi-function types with diameter displaying function are also available for lathes. (Contact Mitutoyo.)
- All units come with two mounting brackets, each located at either end of the scale.
- With SPC data output.

SPC  
ABSOLUTE™


| Order No   | Model    | Range           | Accuracy       | Resolution      | Type                       | List     | Promo    |
|------------|----------|-----------------|----------------|-----------------|----------------------------|----------|----------|
| 572-210-30 | SD-4"DX  | 0-4" / 0-100mm  | .001" / 0.03mm | .0005" / 0.01mm | Horizontal Single-function | \$331.00 | \$321.00 |
| 572-211-30 | SD-6"DX  | 0-6" / 0-150mm  | .001" / 0.03mm | .0005" / 0.01mm | Horizontal Single-function | \$350.00 | \$333.00 |
| 572-212-30 | SD-8"DX  | 0-8" / 0-200mm  | .001" / 0.03mm | .0005" / 0.01mm | Horizontal Single-function | \$398.00 | \$386.00 |
| 572-213-10 | SD-12"D  | 0-12" / 0-300mm | .002" / 0.04mm | .0005" / 0.01mm | Horizontal Single-function | \$769.00 | \$654.00 |
| 572-310-10 | SDV-6"D  | 0-4" / 0-100mm  | .001" / 0.03mm | .0005" / 0.01mm | Vertical Single-function   | \$367.00 | \$349.00 |
| 572-311-10 | SDV-6"D  | 0-6" / 0-150mm  | .001" / 0.03mm | .0005" / 0.01mm | Vertical Single-function   | \$389.00 | \$370.00 |
| 572-312-10 | SDV-8"D  | 0-8" / 0-200mm  | .001" / 0.03mm | .0005" / 0.01mm | Vertical Single-function   | \$451.00 | \$383.00 |
| 572-313-10 | SDV-12"D | 0-12" / 0-300mm | .002" / 0.04mm | .0005" / 0.01mm | Vertical Single-function   | \$868.00 | \$738.00 |




MeasurLink™ ENABLED  
Data Management Software by Mitutoyo

### Applications


Machine table position



Drilling machine stroke position




Focus setting on optical instruments




### Special Applications

As a measurement jig for outdoor use (SD-G)



Detector head mechanism



Prices effective October 1 through December 23, 2025

# Linear Encoders for Lathes, Grinders, and Mills

**Mitutoyo**

All prices are in Canadian Dollars

## Mitutoyo Digital Readout Packages

Mounting hardware included on all machine retrofit packages

SAVE  
**\$200**  
PER PACKAGE






All DRO Packages Include:

- KA-200 Counter
- KA-200 Counter tray/arm kit
- High Resolution Linear Scales (down to .0001" or better!)
- Bracket Kit(s)

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

| Package Part No. | Description                | X Travel | Y Travel | Z Travel | X Axis Type | Y Axis Type | Z Axis Type | List       | Promo      |
|------------------|----------------------------|----------|----------|----------|-------------|-------------|-------------|------------|------------|
| 64PKA058D        | 12" X 30" DRO Mill Package | 30"      | 12"      | -        | AT715       | AT715       | -           | \$2,303.00 | \$2,103.00 |
| 64PKA059D        | 12" X 36" DRO Mill Package | 36"      | 12"      | -        | AT715       | AT715       | -           | \$2,341.50 | \$2,141.50 |
| 64PKA060C        | 14" X 30" DRO Mill Package | 30"      | 14"      | -        | AT715       | AT715       | -           | \$2,201.00 | \$2,001.00 |
| 64PKA175B        | 16" X 30" DRO Mill Package | 30"      | 16"      | -        | AT715       | AT715       | -           | \$2,314.00 | \$2,114.00 |
| 64PKA062D        | 16" X 36" DRO Mill Package | 36"      | 16"      | -        | AT715       | AT715       | -           | \$2,353.00 | \$2,153.00 |
| 64PKA063C        | 16" X 40" DRO Mill Package | 40"      | 16"      | -        | AT715       | AT715       | -           | \$2,380.00 | \$2,180.00 |
| 64PKA039C        | 8" X 40" Lathe Package     | 8"       | -        | 40"      | AT113       | -           | AT715       | \$2,508.00 | \$2,308.00 |
| 64PKA194B        | 8" X 36" Lathe Package     | 8"       | -        | 36"      | AT113       | -           | AT715       | \$2,482.00 | \$2,282.00 |
| 64PKA054A        | 48" X 14" Lathe Package    | 14"      | -        | 48"      | AT116       | -           | AT715       | \$2,075.00 | \$1,875.00 |
| 64PKA052B        | 14" X 40" Lathe Package    | 14"      | -        | 40"      | AT116       | -           | AT715       | \$2,310.00 | \$2,110.00 |
| 64PKA057B        | 16" X 60" Lathe Package    | 16"      | -        | 60"      | AT116       | -           | AT715       | \$2,875.00 | \$2,675.00 |
| 64PKA026B        | 6" X 12" Grinder Package   | 6"       | 12"      | -        | AT113       | AT113       | -           | \$3,301.00 | \$3,101.00 |
| 64PKA028C        | 8" X 12" Grinder Package   | 8"       | 12"      | -        | AT113       | AT113       | -           | \$3,362.00 | \$3,162.00 |
| 64PKA029B        | 8" X 14" Grinder Package   | 12"      | 14"      | -        | AT113       | AT113       | -           | \$3,406.00 | \$3,206.00 |

Other packages and kits are available for mills, lathes, grinders and custom machines and applications. Contact your local distributor for details.

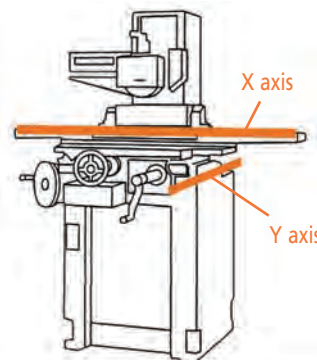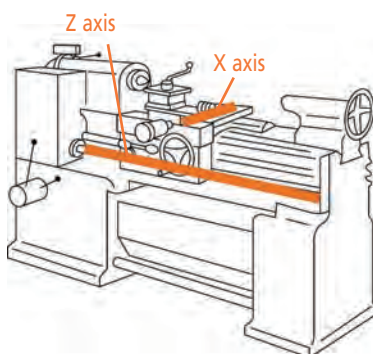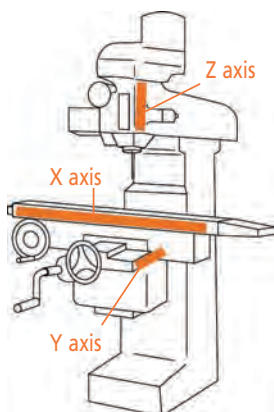

**Tool+Cutter**  
www.toolandcutter.com

All prices are in Canadian Dollars

## Rockwell and Rockwell Superficial Hardness Tester

With Real-Time Electronic Test Force Control

- Closed-loop control of testing forces.
- Initial and Total test forces (loads) are applied with unparalleled accuracy and repeatability.
- Extended indenter arm reaches inside diameters and hard-to-reach surfaces at eye level, allowing the operator to easily see where the indenter accesses small or hard-to-reach parts.
- Automatic cycle start after initial set point is reached.
- Continuous test mode for automatic testing of all like-sized parts.
- All hardness parameters set automatically via the touch screen.
- Cylindrical and spherical surface corrections.
- Auto conversion to most common hardness scales or tensile strength.

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

| Model No.                | HR-530                                                        | HR-530L                                                                                                                                                                                |
|--------------------------|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order No.                | 810-233-33                                                    | 810-333-33                                                                                                                                                                             |
| Hardness testing methods | Rockwell / Rockwell Superficial / Brinell / Plastics Hardness |                                                                                                                                                                                        |
| Initial Test Force       | 29.42 N (3kgf), 98.07 N (10kgf)                               |                                                                                                                                                                                        |
| Test Force (N)           | Superficial                                                   | 147.1 N (15kgf), 294.2 N (30kgf), 441.3 M (45kgf)                                                                                                                                      |
|                          | Rockwell                                                      | 588.4 N (60kgf), 980.7 N (100kgf), 1471 N (150kgf)                                                                                                                                     |
|                          | Light Force Brinell                                           | 61.29 N (6.25kgf), 98.07 N (10kgf), 153.2 N (15.625kgf), 245.2 N (25kgf), 294.2 N (30kgf), 306.5 N (31.25kgf), 612.9 N (62.5kgf), 980.7 N (100kgf), 1226 N (125kgf), 1839 N (187.5kgf) |
| Test Force Control       | Automatic (load / hold / unload)                              |                                                                                                                                                                                        |
| Maximum Specimen Size    | Height: 9.8" (250mm)<br>Depth: 5.9" (150mm)                   | Height: 15.5" (395mm)<br>Depth: 5.9" (150mm)                                                                                                                                           |
| External Data Output     | RS-232C, Digimatic, USB2.0                                    |                                                                                                                                                                                        |
| External Dimensions      | Main Unit                                                     | 9.84" x 26.38" x 23.82"<br>(250 w x 667 d x 621 h mm)                                                                                                                                  |
|                          | Touch-Panel Display                                           | 11.6" x 26.2" x 30.1"<br>(300 w x 667 d x 766 h mm)                                                                                                                                    |
| Mass                     | Approx. 60 kg                                                 | Approx. 69 kg                                                                                                                                                                          |
| List                     | \$20,901.00                                                   | \$28,788.48                                                                                                                                                                            |
| Promo                    | <b>\$19,000.00</b>                                            | <b>\$26,198.00</b>                                                                                                                                                                     |

\* Must purchase Power Cord 02ZAA010

**10% OFF**

10% off all Packages



**FREE SHIPPING**

Free Shipping



Installation & Calibration Included

HR-530  
810-233-33



**10% OFF**

10% off all Packages



**FREE SHIPPING**

Free Shipping



Installation & Calibration Included

HR-530L  
810-333-33



## ASTM Compliant HR Series Rockwell and Superficial Hardness Tester Packages Include:

- Certified Blocks and Indenters
- C and N Scale Indenter
- 1/16" Carbide Ball Indenter
- HRC30 Rockwell Test Block
- HRC63 Rockwell Test Block
- HRBW95 Rockwell Test Block
- HR30N60 Rockwell Test Block
- HR30TW70 Rockwell Test Block
- Certificate stating conformance to ASTM E 18
- Mitutoyo Installation and A2LA Calibration



\*HR-430MR includes only diamond indenter, C-scale indenter, HRC and HRBW blocks listed above\*

### Calibration Set

| Order No.                          | Order No.   | Order No.   | Order No.    |
|------------------------------------|-------------|-------------|--------------|
| 64HAA462                           | 64HAA463    | 64HAA464    | 64HAA465     |
| HRC Scale                          | HRBW Scale  | HR30N Scale | HR30TW Scale |
| Test Blocks                        | Test Blocks | Test Blocks | Test Blocks  |
| 64HAA181                           | 64HAA172    | 64HAA270    | 64HAA303     |
| 64HAA177                           | 64HAA170    | 64HAA266    | 64HAA301     |
| 64HAA173                           | 64HAA168    | 64HAA262    | 64HAA299     |
| Universal Style Indenter with Flat |             |             |              |
| 64HAA100                           | 64HAA119    | 64HAA101    | 64HAA119     |

## A Complete Line of ASTM Compliant Rockwell Hardness Testing Machines

**10% OFF**

10% off all Packages



Free Shipping



Installation & Calibration Included



|                                                                                 | HR-320MS    | HR-430MR    | HR-430MS    | HR-530/HR-530L                            | HR-610A/HR-620A                            | HR-620B     |
|---------------------------------------------------------------------------------|-------------|-------------|-------------|-------------------------------------------|--------------------------------------------|-------------|
| Rockwell Scales                                                                 |             | X           |             |                                           |                                            |             |
| Rockwell and Superficial                                                        | X           |             | X           | X                                         | X                                          | X           |
| Dead Weight                                                                     | X           | X           | X           |                                           |                                            |             |
| Individual Hanging Weights                                                      | X           |             |             |                                           |                                            |             |
| Dial Weight                                                                     |             | X           | X           |                                           |                                            |             |
| Automatic break                                                                 |             | X           | X           |                                           |                                            |             |
| Closed Loop                                                                     |             |             |             | X                                         | X                                          | X           |
| Digital Display                                                                 | X           | X           | X           | X                                         | X                                          | X           |
| 7.1" Max Sample Height                                                          | X           | X           | X           |                                           |                                            |             |
| 9.8" Max Sample Height                                                          |             |             |             | HR-530                                    | X                                          | X           |
| 15.5" Max Sample Height                                                         |             |             |             | HR-530L                                   |                                            |             |
| 6.5" Max Depth                                                                  | X           | X           | X           |                                           |                                            |             |
| 5.9" Max Depth                                                                  |             |             |             |                                           |                                            |             |
| 8.6" Max Depth                                                                  |             |             |             | X                                         | X                                          | X           |
| CNC                                                                             |             |             |             |                                           |                                            | X           |
| Motorized X Stage (Optional)                                                    |             |             |             |                                           | X                                          | X           |
| Motorized Y Stage                                                               |             |             |             |                                           |                                            | X           |
| Software Control and Analysis                                                   |             |             |             |                                           |                                            | X           |
| ASTM Compliant HR Series Rockwell & Rockwell Superficial Packages - All 10% Off | 810-192-21  | 810-193-21  | 810-194-31  | 810-233-33 (HR530) or 810-333-33 (HR530L) | 810-512-23 (HR610A) or 810-522-23 (HR620A) | 810-527-21  |
| List                                                                            | \$12,622.00 | \$14,126.00 | \$18,580.32 | \$20,901.00 / \$28,788.48                 | \$39,196.00 / \$42,453.00                  | \$70,791.00 |
| Promo                                                                           | \$11,359.80 | \$12,713.40 | \$16,722.29 | \$19,000.00 / \$26,198.00                 | \$35,276.40 / \$38,207.70                  | \$63,711.90 |

\* Must purchase Power Cord 022AA010

## Scalable Interfacing Options



HR-320MS, HR-430MR, HR-430MS Interface



HR-530, HR-530L, HR-610A & HR-620A Touchscreen Controller



HR-620B PC Interface, Utilizing AVPAK Software



All prices are in Canadian Dollars

## Heavy Load Hardness Testers - HV Series

### Highly Versatile Basic Model

#### HV-110/120 System A

- › Equipped with a high performance motorized test force selection function and motorized turret mounts.
- › Operates as smoothly as electric models but with the certainty of traditional test forces.
- › A list function makes it easy to perform multi-point and average hardness evaluations which required extra effort or external data processors with conventional manual models. This convenient screen enables consistency of test results.
- › Motorized test force selection and motorized turret positions can be easily controlled via a touch screen control panel. Adjustable X-Y stage with built-in digital micrometers for detailed measurement analysis.


25% OFF



| Model  | Test Force |        |        |       |       |       |        |       |       | Order No.  | Body   | List            | Promo |
|--------|------------|--------|--------|-------|-------|-------|--------|-------|-------|------------|--------|-----------------|-------|
| HV-110 | V.S*       | HV1    | HV2    | HV3   | HV4   | HV5   | HV10   | HV20  | HV50  | 810-440-13 | A TYPE | Request a Quote |       |
|        | N          | 9.807  | 19.61  | 29.52 | 49.03 | 98.07 | 196.10 | 294.2 | 490.3 |            |        |                 |       |
|        | kgf        | 1      | 2      | 3     | 5     | 10    | 20     | 30    | 50    |            |        |                 |       |
| HV-120 | V.S*       | HV 0.3 | HV 0.5 | HV1   | HV2.5 | HV5   | HV10   | HV20  | HV30  | 810-445-13 | A TYPE |                 |       |
|        | N          | 2.942  | 4.903  | 9.807 | 24.51 | 49.03 | 98.07  | 196.1 | 294.2 |            |        |                 |       |
|        | kgf        | 0.3    | 0.5    | 1     | 2.5   | 5     | 10     | 20    | 30    |            |        |                 |       |

\*V.S - Vickers Scale

\*Additional Components Required for a Complete System

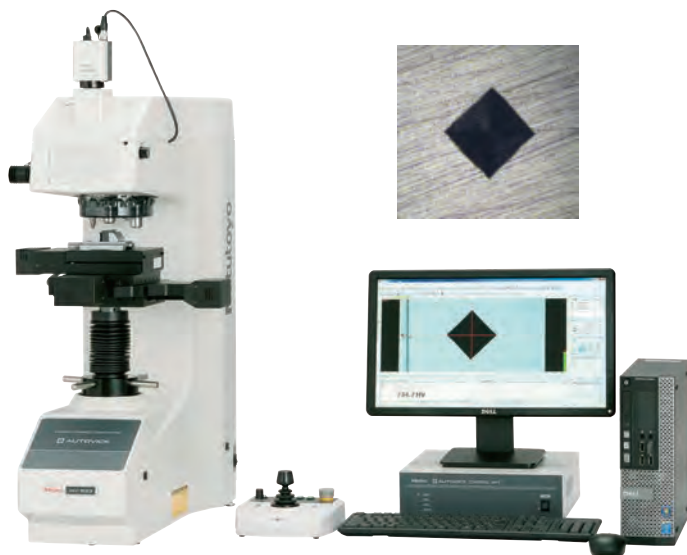

### Advanced models promise additional productivity improvements

#### HV-110/120 System B,D

- › B and D series testers feature AVPAK dedicated image software enabling automatic indentation reading with excellent automatic edge detection capability, reducing reading variation and visual error.
- › D series testers add powered X-Y stages which enable automatic continuous testing. This allows extended multi-point testing, complex pattern creation and multiple workpiece analysis to be carried out automatically.
- › D series testers add Auto Focus and create a fully automatic system that dramatically shortens the cycle time of your test and indentation analysis!

25% OFF

| Model  | Test Force |        |        |       |       |       |        |       |       | Order No. | Body       | List            | Promo |
|--------|------------|--------|--------|-------|-------|-------|--------|-------|-------|-----------|------------|-----------------|-------|
| HV-110 | V.S*       | HV1    | HV2    | HV3   | HV4   | HV5   | HV10   | HV20  | HV50  | 810-443A  | B / D TYPE | Request a Quote |       |
|        | N          | 9.807  | 19.61  | 29.52 | 49.03 | 98.07 | 196.10 | 294.2 | 490.3 |           |            |                 |       |
|        | kgf        | 1      | 2      | 3     | 5     | 10    | 20     | 30    | 50    |           |            |                 |       |
| HV-120 | V.S*       | HV 0.3 | HV 0.5 | HV1   | HV2.5 | HV5   | HV10   | HV20  | HV30  | 810-448A  | B / D TYPE |                 |       |
|        | N          | 2.942  | 4.903  | 9.807 | 24.51 | 49.03 | 98.07  | 196.1 | 294.2 |           |            |                 |       |
|        | kgf        | 0.3    | 0.5    | 1     | 2.5   | 5     | 10     | 20    | 30    |           |            |                 |       |

\*V.S - Vickers Scale

\*Additional Components Required for a Complete System

Prices effective October 1 through December 23, 2025

## Micro Vickers Hardness Testers - HM Series

- HM Type A systems include a built-in measuring eyepiece for indentation analysis and accurate workpiece positioning.
- Automatic Turret (Touch-screen controlled in Type A systems and software controlled via AVPAK in Type B and D systems).
- Test force range 10g-1000g (HM-210) and .05-2000g (HM-220).
- LED illumination.
- Type B and D systems include a camera for software analysis (Type A systems can use optional camera for digital imagery).
- Type A and B systems use micrometer-controlled adjustable stages and Type D systems utilize a motorized XY Stage.

**20% OFF**

20% off all Packages

**FREE SHIPPING**

Free Shipping



Installation & Calibration Included




64AAB305PA  
HM-210A

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

*Seamless assistance is a scan away -  
Connect with your local representative  
by making an inquiry today!*

## 20% OFF MICRO VICKERS TESTERS!

| Functions                                         | System A                                                                          | System B                                                                          | System D                                                                           |
|---------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                                                   |  |  |  |
| Focusing                                          | Manual                                                                            | Manual                                                                            | Automatic                                                                          |
| Testing Action                                    | Single Point                                                                      | Single Point                                                                      | Pattern Specific                                                                   |
| Test-point Positioning                            | Manual X-Y Stage                                                                  | Manual X-Y Stage                                                                  | Automatic X-Y Stage                                                                |
| Measuring Indentations                            | Manual Monoscope                                                                  | Automatic by AVPAK                                                                | Automatic by AVPAK                                                                 |
| Camera (for observing and measuring indentations) | 600,000 Pixels B&W*                                                               | Color, 3 Million Pixels                                                           | Color, 3 Million Pixels                                                            |
| Operating the Main Unit                           | Touch Panel                                                                       | PC**                                                                              | PC**                                                                               |
| Order No                                          | 64AAB305PA                                                                        | 64AAB323PA                                                                        | 64AAB380PA                                                                         |
| Main Unit                                         | HM-210A                                                                           | HM-210B                                                                           | HM210D                                                                             |
| List                                              | Request a Quote                                                                   |                                                                                   |                                                                                    |
| Promo                                             |                                                                                   |                                                                                   |                                                                                    |

\*\* PC sold separately

\*Additional packages available. Please contact your local Mitutoyo distributor or Mitutoyo sales representative.

## Portable Hardness Testers

### Durometers (Digital and Analog)

For Rubber and Plastic Hardness Testing



Compact Dial  
811-335-10



Compact Digital  
811-336-10



**MeasurLink** ENABLED  
Data Management Software by Mitutoyo

| Order No   | Model  | Scale   | Display | Graduation | Range | Indenter    | List       | Promo      |
|------------|--------|---------|---------|------------|-------|-------------|------------|------------|
| 811-335-10 | HH-335 | Shore A | Analog  | 1.0        | 10~90 | Blunt Taper | \$854.00   | \$768.60   |
| 811-336-10 | HH-336 | Shore A | Digital | 0.5        | 10~90 | Blunt Taper | \$1,825.00 | \$1,642.50 |
| 811-337-10 | HH-337 | Shore D | Analog  | 1.0        | 20~90 | Sharp Point | \$854.00   | \$768.60   |
| 811-338-10 | HH-338 | Shore D | Digital | 0.5        | 20~90 | Sharp Point | \$1,825.00 | \$1,642.50 |

### HH-411 Hardmatic

Rebound Leeb portable hardness tester featuring reproducibility and ease of operation on large parts. It is lightweight and can be carried into the shop or out in the field.

| Order No.  | Type             | List       | Promo      |
|------------|------------------|------------|------------|
| 810-298-10 | HH-411 Hardmatic | \$5,695.00 | \$5,410.00 |

**MeasurLink** ENABLED  
Data Management Software by Mitutoyo



All prices are in Canadian Dollars

## MF Measuring Microscopes with Metlogix M2 Software and Touch-Screen Tablet

Featuring M2 geometric measuring display

- Highest measuring accuracy in its class.
- Stage travel range up to 400mm x 200mm / 16in x 8in.
- Quick release mechanism and zero-set buttons on stage controls increase operability when working on larger workpieces.
- Easy-to-use all-in-one PC Touch Screen Display.
- M2 Geometric 2D Measurement Software.
- Camera port is standard on all models.
- Wide range of objectives available from 1x to 100x.
- M2 Retrofit package available for D generation MF and MF-U microscopes.
- Microscope packages with M2 software and tablet are listed below.

20%  
OFF172-864-10 - MF-A3017,  
LED, BINOCULAR TUBE,  
64PKA234A - M2 SYSTEMMeasurLink<sup>®</sup> ENABLED  
Data Management Software by Mitutoyo

### Main Units on Promotion

| Order No   | Description                                     | List            | Promo |
|------------|-------------------------------------------------|-----------------|-------|
| 176-961-13 | MF-A1010D 100x100mm (mm/inch) Manual Microscope | Request a Quote |       |
| 176-962-13 | MF-A2010D 200x100mm (mm/inch) Manual Microscope |                 |       |
| 176-963-13 | MF-A2017D 200x170mm (mm/inch) Manual Microscope |                 |       |
| 176-864-10 | MF-A3017D 300x170mm (mm/inch) Manual Microscope |                 |       |
| 176-965-13 | MF-A4017D 400x200mm (mm/inch) Manual Microscope |                 |       |
| 64PKA234A  | M2 Retrofit Kit for MF/MF-U Microscopes         |                 |       |

\*Additional stage configurations and sizes available

## MF-U Measuring Microscopes

- Measuring accuracy that is highest in its class (and conforms to JIS B 7153).
- Compatible with both brightfield and darkfield objective lenses.
- Manual or motorized turrets available dependent on model.
- Compatible with M2 retrofit Kit.

20%  
OFF176-872-10 MF-UA2010 - with  
64PKA234A M2 Software/HardwareMeasurLink<sup>®</sup> ENABLED  
Data Management Software by Mitutoyo

|                              |                                                                               |
|------------------------------|-------------------------------------------------------------------------------|
| Model No. (XY stage size)    | MF-UA2010D                                                                    |
| Order No.                    | 176-872-10                                                                    |
| XY stage travel range        | 8 x 4" / 200 x 100mm                                                          |
| Z-axis travel range          | 6" / 150mm                                                                    |
| Focusing method              | Manual focusing (Coarse focusing: 30mm/rev., Fine focusing: 0.2mm/rev.)       |
| Measurement method           | Linear encoder (2-axis model: X / Y-axis)                                     |
| Resolution (switchable)      | .0001" / .00005" / .00001" (0.001mm / 0.0005mm / 0.0001mm)                    |
| Measuring accuracy (at 20°C) | XY-axis: (2.2+0.02L)µm, L = Measuring length (mm) when not loaded, JIS B 7153 |
| Floating function            | X and Y axes with Quick-release mechanism                                     |
| XY stage top size            | 13.78 x 11.02" / 350 x 280 mm                                                 |
| Effective glass size         | 9.84 x 5.09" / 250 x 150 mm                                                   |
| Max. stage loading           | 22lbs / 10kg                                                                  |
| Max. workpiece height        | 6" / 150mm                                                                    |
| List                         | Request a Quote                                                               |
| Promo                        |                                                                               |

\*Additional components required for a complete system

Prices effective October 1 through December 23, 2025

## TM Toolmakers' Microscopes

- Adjustable illumination intensity.
- Angle measurement is performed easily by turning the angle scale disc to align the cross-hair reticle with the workpiece image.
- Includes standard accessories which create an overall magnification of 30X. Magnifications can be changed from 20X - 200X by using optional objectives and/or eyepieces.
- .000050" Resolution Digimatic micrometer heads included.

MeasurLink<sup>TM</sup> ENABLED  
Data Management Software by Mitutoyo




Newly designed LED illumination

10% OFF

TM-A505B  
176-820A



| Model No.          |                                | TM-A505B                                                                           | TM-A1005B                                                                                                            |
|--------------------|--------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Order No.          |                                | 176-820-11A                                                                        | 176-821-11A                                                                                                          |
| Eyepiece           |                                | Standard accessory: 15X (field number: 13), Options: 10X, 20X                      |                                                                                                                      |
| Objective lens     |                                | Standard accessory: 2X, Options: 5X, 10X                                           |                                                                                                                      |
| Microscope head    | Maximum height of workpiece    | 4.53" / 115mm                                                                      | 4.21" / 107mm                                                                                                        |
|                    | Transmitted illumination       | Stepless brightness adjustment, White LED light source, with green filter          |                                                                                                                      |
| Illumination unit  | Surface illumination           | Oblique single-source type, Stepless brightness adjustment, White LED light source |                                                                                                                      |
|                    | Measuring range                | 2" x 2" / 50x50mm                                                                  | 4" x 2" / 100x50mm<br>(An optional 2"/50mm gage block is required to cover full range. A CERA block is recommended.) |
| Cross-travel stage | Usable area of the stage glass | 3.8" x 3.8" / 96x96mm                                                              | 6" x 3.8" / 154x96mm                                                                                                 |
|                    | Maximum stage glass loading    | 11 lbs. / 5kg                                                                      |                                                                                                                      |
|                    | Linear measurement method      | Micrometer heads included                                                          |                                                                                                                      |
| List               |                                | \$7,969.00                                                                         | \$10,392.00                                                                                                          |
| Promo              |                                | \$7,172.10                                                                         | \$9,352.80                                                                                                           |

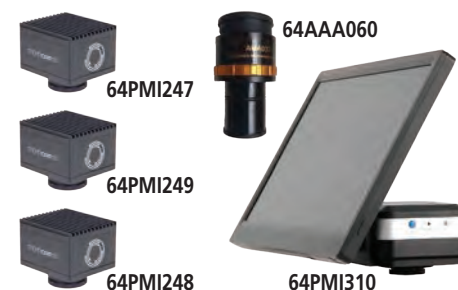

| Order No. | Description                                       |
|-----------|---------------------------------------------------|
| 64PMI247  | MOTICAM S1, 1.2 MEGAPIXEL-1/3" CMOS, USB          |
| 64PMI249  | MOTICAM S3, 3.0 MEGAPIXEL-1/2" CMOS, USB          |
| 64PMI248  | MOTICAM S6, 6.0 MEGAPIXEL-1/1.8" CMOS, USB        |
| 64PMI252  | MOTI-CAM 4000, 8 MEGAPIXEL, 1/1.8" CMOS, USB/HDMI |
| 63AAA060  | .37x C-Mount Eyetube Adapter                      |

## Trinocular Stereo Microscope SMZ143-N2LED

- Continuous 1X - 4X magnification.
- Image always in focus throughout zoom range.
- Crisp, erect images with high resolution and excellent stereoscopic effect.
- Stereo-tube can be rotated a full 360° for viewing at any angle.
- Bilateral zoom control knob adds convenience and increases operator efficiency.
- Diopter adjustment for both eyepieces.

| Model               | MSM-414TL            |
|---------------------|----------------------|
| Order No.           | 377-993A             |
| Optical tube        | Trinocular head      |
| Total magnification | 10X - 40X            |
| Eyepiece            | Widefield WF10X/20mm |
| Objective           | 1X - 4X              |
| Working distance    | 80mm                 |
| Field of view       | 20mm - 5mm           |
| Dimensions          | 237x170x335mm        |
| Mass                | 6.2kg                |

10% OFF



| Order No.                        | Description                                               | List            | Promo      |
|----------------------------------|-----------------------------------------------------------|-----------------|------------|
| Stereo Microscope Unit           |                                                           |                 |            |
| 377-993A                         | MSM-414TL TRINOCULAR MICROSCOPE                           | Request a Quote |            |
| Observational Camera Accessories |                                                           |                 |            |
| 377-481                          | C-mount Video Adapter for SMZ143-N2LED                    | \$76.00         | \$68.40    |
| 64PMI309                         | MOTICAM 4000X, 1.45 x 1.45µm PIXEL, HDMI / USB MULTIPOINT | \$3,100.00      | \$2,790.00 |

\*377-481 and 64PMI252 purchased separately




Camera with software for digital viewing



# ALWAYS THERE. ALWAYS READY.

## YOUR DEDICATED SUCCESS TEAM

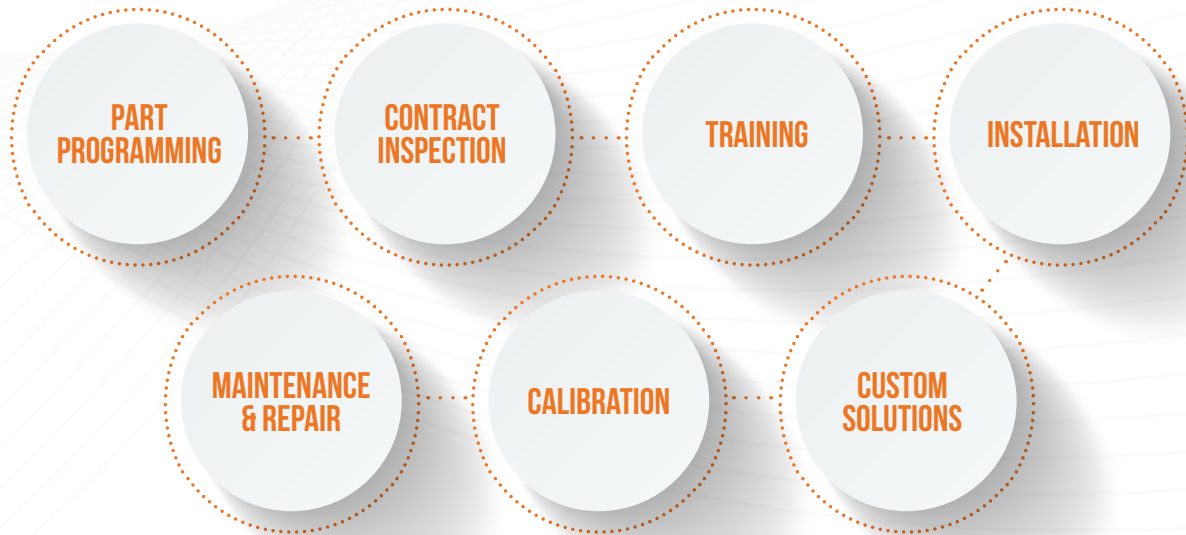

Distributed By:



# Tool+Cutter

[www.toolandcutter.com](http://www.toolandcutter.com)



[support@toolandcutter.com](mailto:support@toolandcutter.com) 1.800.265.6056

We reserve the right to change prices and specifications without notice. Visit [mitutoyo.ca/promotions](http://mitutoyo.ca/promotions) to ensure pricing is up to date. Not valid with any other offer or promotion. This promotion is for Canadian market only. Request formal quotation for complete details.

**Note:** All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We reserve the right to make changes to the corresponding designs. The stated standards, technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the products are subject to Canadian Export Administration Regulations. Re-export or relocation of Mitutoyo products may require prior approval by an appropriate governing authority. We try to be as accurate as possible, however, there may be some errors in text, specifications or price. Please confirm with your customer service rep. Some items may not be exactly as shown. Prices are in Canadian dollars, unless otherwise specified. Applicable taxes and shipping charges are extra.

# Mitutoyo

Mitutoyo Canada | Precision is our Profession

**EXPERIENCE MITUTOYO  
M3 SOLUTION CENTERS**

Printed in Canada • September 2025